999815202 - 01/2019
en-GB


ATI
ATI-PRODUCTS & SERVICES

The Formwork Experts.

Safety net fan SNF

User Information

Instructions for assembly and use (Method statement)

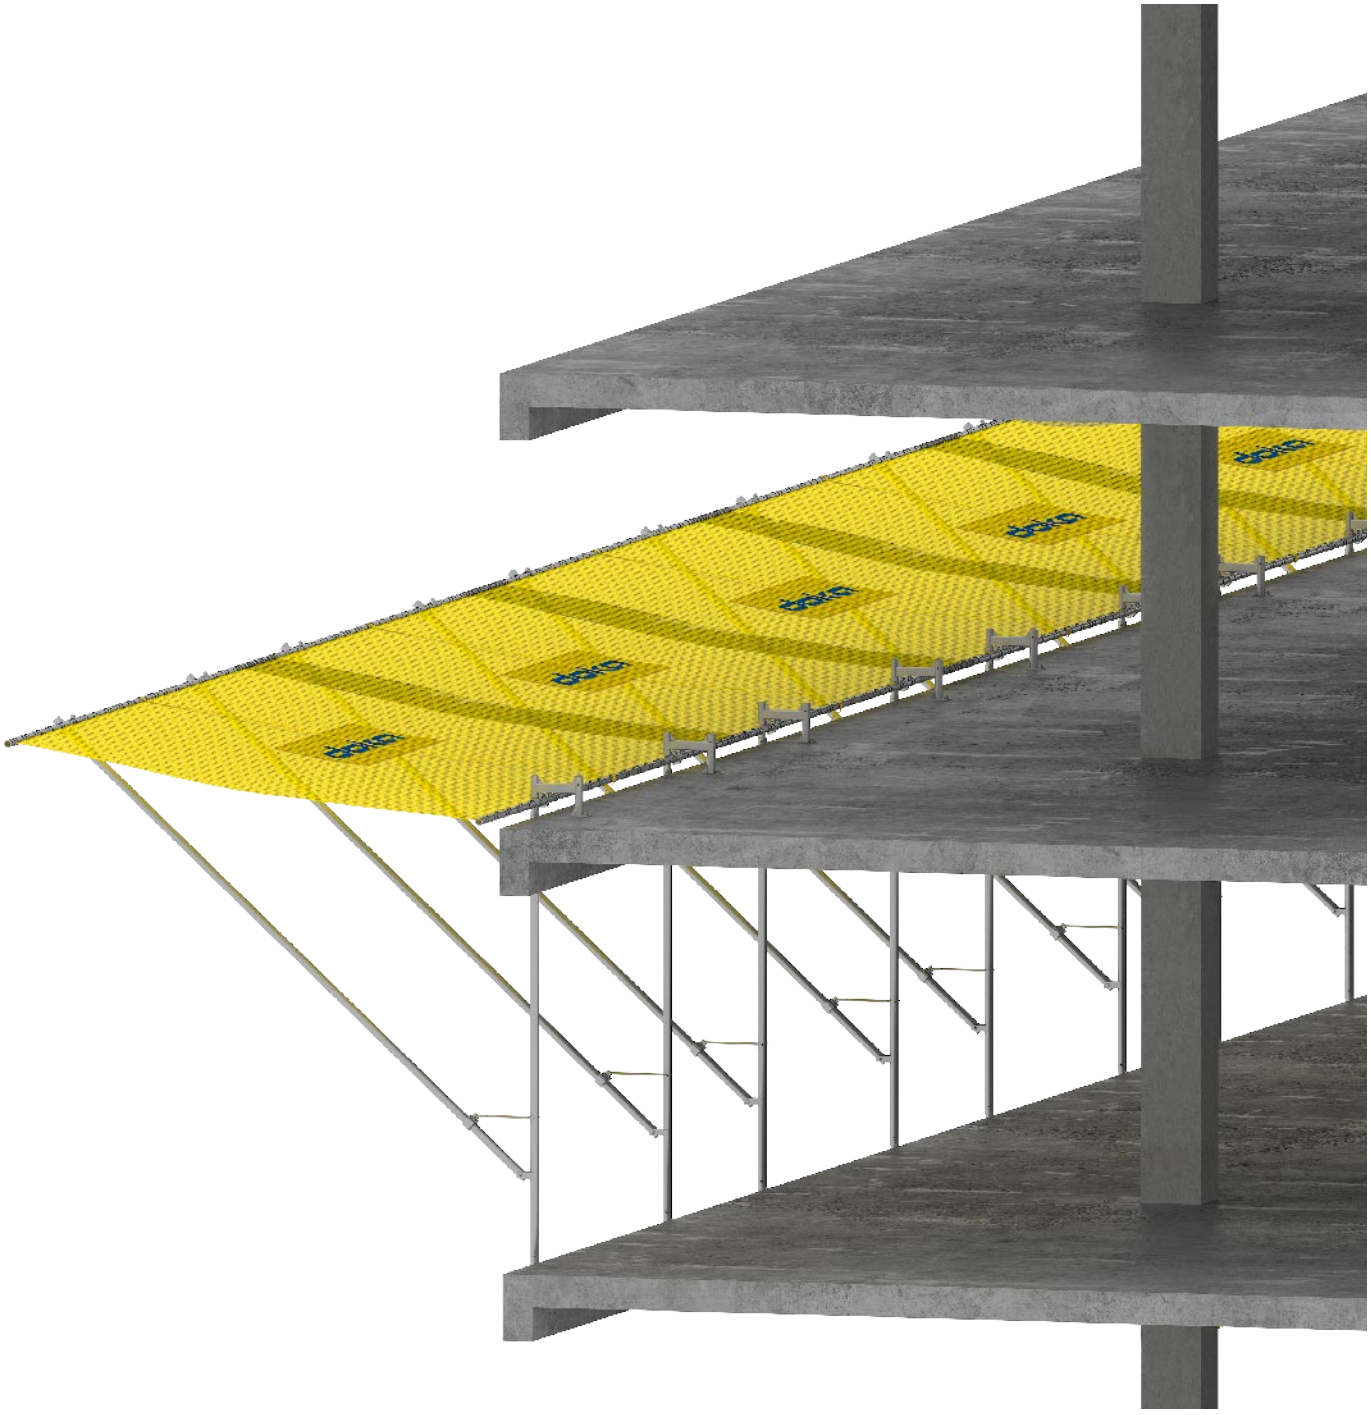

Contents

3 Elementary safety warnings
6 Declaration of conformity

8 Design guide

10 System overview
14 Required Tools For Assembly
15 Anchoring to the structure
16 Step by step Installation
24 Overlap
26 Additional area of use
32 Wind Loading

33 Safety Net Fan net label

34 Safety

38 Product overview

Elementary safety warnings

User target groups

- This booklet is aimed at all persons who will be working with the Doka product or system that it describes. It contains information on the standard design for setting up this system, and on correct, compliant utilisation of the system.
- All persons working with the product described herein must be familiar with the contents of this booklet and with all the safety instructions it contains.
- Persons who are incapable of reading and understanding this booklet, or who can do so only with difficulty, must be instructed and trained by the customer.
- The customer is to ensure that the information materials provided by Doka (e.g. User Information booklets, Instructions for Assembly and Use, Operating Instruction manuals, plans etc.) are available to all users, and that they have been made aware of them and have easy access to them at the usage location.
- In the relevant technical documentation and formwork utilisation plans, Doka shows the workplace safety precautions that are necessary in order to use the Doka products safely in the usage situations shown.
  In all cases, users are obliged to ensure compliance with national laws, Standards and rules throughout the entire project and to take appropriate additional or alternative workplace safety precautions where necessary.

Hazard assessment

- The customer is responsible for drawing up, documenting, implementing and continually updating a hazard assessment at every job-site.
  This booklet serves as the basis for the site-specific hazard assessment, and for the instructions given to users on how to prepare and utilise the system. It does not substitute for these, however.

Remarks on this booklet

- This booklet can also be used as a generic method statement or incorporated with a site-specific method statement.
- **Many of the illustrations in this booklet show the situation during formwork assembly and are therefore not always complete from the safety point of view.**
  Any safety accessories not shown in these illustrations must still be used by the customer, in accordance with the applicable rules and regulations.
- **Further safety instructions, especially warnings, will be found in the individual sections of this booklet!**

Planning

- Provide safe workplaces for those using the formwork (e.g. for when it is being erected/dismantled, modified or repositioned etc). It must be possible to get to and from these workplaces via safe access routes!
- **If you are considering any deviation from the details and instructions given in this booklet, or any application which goes beyond those described in the booklet, then revised static calculations must be produced for checking, as well as supplementary assembly instructions.**

Regulations; industrial safety

- All laws, Standards, industrial safety regulations and other safety rules applying to the utilisation of our products in the country and/or region in which you are operating must be observed at all times.
- If a person or object falls against, or into, the sideguard component and/or any of its accessories, the component affected may only continue in use after it has been inspected and passed by an expert.

Rules applying during all phases of the assignment:

- The customer must ensure that this product is erected and dismantled, reset and generally used for its intended purpose under the direction and supervision of suitably skilled persons with the authority to issue instructions. These persons' mental and physical capacity must not in any way be impaired by alcohol, medicines or drugs.
- Doka products are technical working appliances which are intended for industrial/commercial use only, always in accordance with the respective Doka User Information booklets or other technical documentation authored by Doka.
- The stability of all components and units must be ensured during all phases of the construction work!
- The functional/technical instructions, safety warnings and loading data must all be strictly observed and complied with. Failure to do so can cause accidents and severe (even life-threatening) damage to health, as well as very great material damage.
- Fire-sources are not permitted anywhere near the formwork. Heating appliances are only allowed if properly and expertly used, and set up a safe distance away from the formwork.
- The work must take account of the weather conditions (e.g. risk of slippage). In extreme weather, steps must be taken in good time to safeguard the equipment, and the immediate vicinity of the equipment, and to protect employees.
- All connections must be checked regularly to ensure that they still fit properly and are functioning correctly. It is very important to check all screw-type connections and wedge-clamped joins whenever the construction operations require (particularly after exceptional events such as storms), and to tighten them if necessary.
- It is strictly forbidden to weld Doka products – in particular anchoring/tying components, suspension components, connector components and castings etc. – or otherwise subject them to heating. Welding causes serious change in the microstructure of the materials from which these components are made. This leads to a dramatic drop in the failure load, representing a very great risk to safety. The only articles which are allowed to be welded are those for which the Doka literature expressly points out that welding is permitted.

Assembly

- The equipment/system must be inspected by the customer before use, to ensure that it is in suitable condition. Steps must be taken to rule out the use of any components that are damaged, deformed, or weakened due to wear, corrosion or rot.
- Combining our formwork systems with those of other manufacturers could be dangerous, risking damage to both health and property. If you intend to combine different systems, please contact Doka for advice first.
- The equipment/system must be assembled and erected in accordance with the applicable laws, Standards and rules by suitably skilled personnel of the customer's, having regard to any and all required safety inspections.
- It is not permitted to modify Doka products; any such modifications constitute a safety risk.

Transporting, stacking and storing

- Observe all regulations applying to the handling of formwork and scaffolding. In addition, the Doka slinging means must be used - this is a mandatory requirement.
- Remove any loose parts or fix them in place so that they cannot be dislodged or fall free!
- All components must be stored safely, following all the special Doka instructions given in the relevant sections of this booklet!

Maintenance

- Only original Doka components may be used as spare parts. Repairs may only be carried out by the manufacturer or authorised facilities.

Miscellaneous

- We reserve the right to make alterations in the interests of technical progress.

Symbols used

The following symbols are used in this booklet:

NOTICE
Failure to observe this may lead to malfunction or damage.



CAUTION / WARNING / DANGER
Failure to observe this may lead to material damage, and to injury to health which may range up to the severe or even life-threatening.



Instruction
This symbol indicates that actions need to be taken by the user.



Sight-check
Indicates that you need to do a sight-check to make sure that necessary actions have been carried out.



Tip
Points out useful practical tips.



Reference
Refers to other documents and materials.

Declaration of Conformity

In this assembly and user's manual, the described "Doka Safety Net Fan System" is connected to the brand name "DOKA" ; the product itself "TSS Safety Net Fans", on which Doka Safety Net Fan is based on is manufactured by TSS Trading LLC and is fully compliant with EN 1263-2 , certified by TÜV SÜD Middle East LLC under the certificate number MUA-16D-5208.

The following table sets the components corresponding with each system and declares the conformity of the different designated and various article numbered components.

Doka		TSS
Description - Name of component	**Doka Item Code**	**TSS Item Code**
Safety net fan 3.10x6.00m SNF	834021010	TSFNTBY3163
Safety net fan 3.10x4.00m SNF	834021020	TSFNTBY3142
Safety net fan extra wide 4.80x6.00m SNF	834021030	TSFNTBY4863
Safety net fan extra wide 4.80x4.00m SNF	834021040	TSFNTBY4842
Safety net 3.10x6.00m SNF	834021050	TSFNTBYNO3163
Safety net 3.10x4.00m SNF	834021060	TSFNTBYNO3142
Safety net extra wide 4.80x6.00m SNF	834021070	TSFNTBYNO4863
Safety net extra wide 4.80x4.00m SNF	834021080	TSFNTBYNO4842
Body 2.75m SNF	834022010	TSFBDYG2.75
Body 3.25m SNF	834022020	TSFBDYG3.25
Extension leg 1.50m SNF	834022030	TSFEXLLG
Extension leg 0.75m SNF	834022040	TSFEXSLG
Slab attachment SNF	834023010	TSFSLATG
Wall attachment SNF	834023020	TSFWAAT
Slab attachment flat SNF	834023030	TSFFLAT
Scaffold attachment SNF	834023040	TSFSCAT
Knee brace SNF	834023050	TSFKBATP
Coupler adjustable SNF	834024010	TSFADJCPP
Double coupler 48/60mm SNF	834024020	TSFDBLCP
Double coupler 48/48mm SNF	834024030	TSFDBLC48
Wind lock SNF	834024040	TSWILKP
Diagonal tube 4.25m SNF	834025010	TSFDIA425
Diagonal tube extension SNF	834025020	TSFDIAGEXT
Extension arm SNF	834025030	TSFEXAR
Support shoe SNF	834025040	TSFSUHHDG
Lifting sling SNF	834025060	TSFLS250
Anchor bolt M12x120 SNF	834025070	TSSANBM12x120
Assembly stool SNF	834025080	TSFASSTL

General Safety information

It is imperative that Doka Fans are installed by competent and trained personnel. Doka offers on-site product training to ensure safe and correct use of products.

Training is strongly recommended.

All Doka Fan components must be inspected by a competent debris prior to re-use. A record inspection of the annual testing of Safety Nets must be kept by the customer.
Following the fall of a heavy object or debris in the Fans, the unit must be inspected by a competent person prior to re-use.
Personnel involved in the assembly and installation of the Fans must be trained and competent on working at height and wear necessary Personal Protective and Fall Protection Equipment.

Description and use

Doka has developed the Doka Fan as a result of a comprehensive study of the problems associated with the falling of objects and debris as well as risks of falling objects for the workers or members of public below, during the construction stage of structures.

The Doka Fan addresses these risks on sites by absorbing the energy of the fall and containing the falling object or person within the net.

Unlike similar products on the market the Doka Fan has the unique ability to adapt to various building shapes and facade materials, as well as coping with high wind loading, particularly in high-rise and exposed structures.

Fan Positioning

Doka Fan Positioning limits according to EN 1263-2


The positioning limits stated in EN 1263-2 for Safety Fans are intended for the purpose of arresting the fall of objects from height.

In accordance with EN1263-2 Safety nets: Part 2: Safety requirements for the positioning limits, Safety Fans designed to arrest the fall of a person should be positioned as follows:

For surfaces sloping less than 20°, the maximum falling height must not exceed 6 m.
For surfaces sloping more than 20°, the maximum falling height must not exceed 3 m.

It is however recommended to install the Doka Fans as close to the risk area as possible to minimise the falling height and the subsequent injury to falling person.


Distance (f) below the Doka Fan unit should not be less the overall height of the Fan unit.
No object must obstruct the bottom of the Doka Fan to ensure undisturbed arrest of fall.

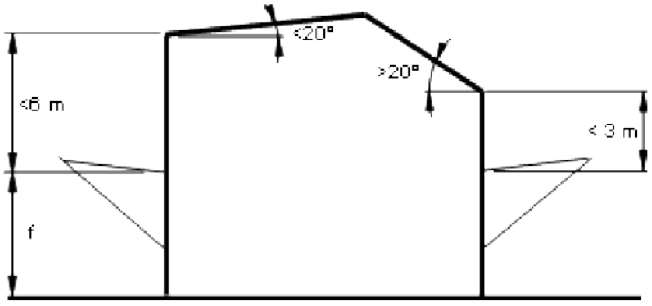



Design guide


Selection Guide

- Establish building floor/floor height
- Select suitable combination of Doka Safety Net Fan Body type (2.75m or 3.25m) and Doka Safety Net Fan extension leg type (Short or Long) from section below
- Select correct product No. from the chart below

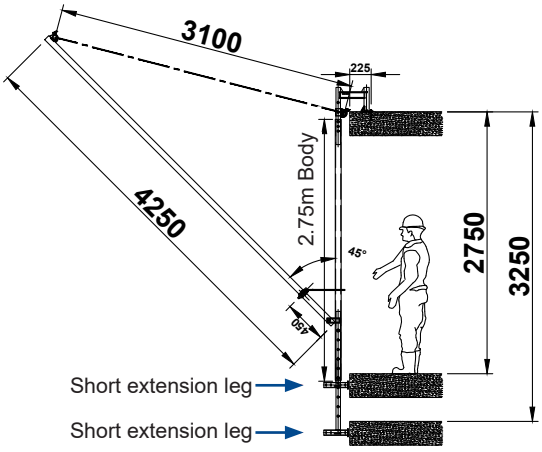

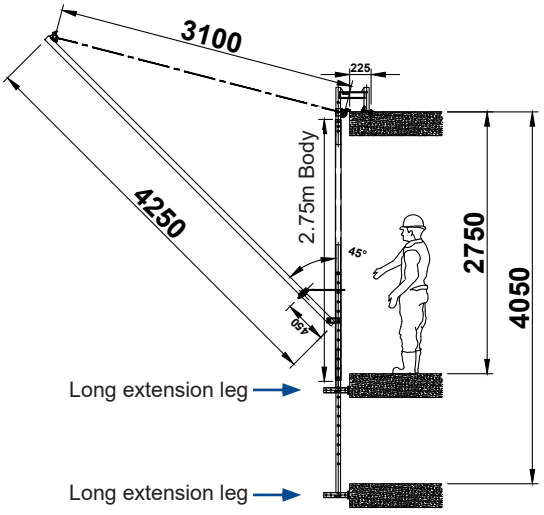

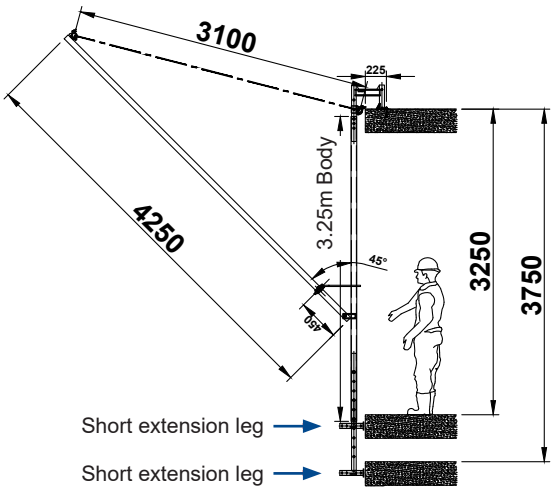

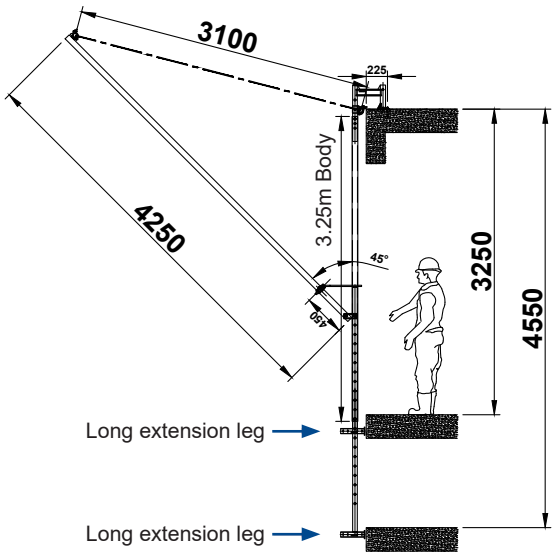



Extension Leg Type				
Body Type	Short		Long	
	Min.	Max.	Min.	Max.
Body 2.75m	2.75m	3.25m	2.75m	4.05m
Body 3.25m	3.25m	3.75m	3.25m	4.55m

Type selection

- Select required fan width
  (Standard type or Extra-wide type)

Standard Type

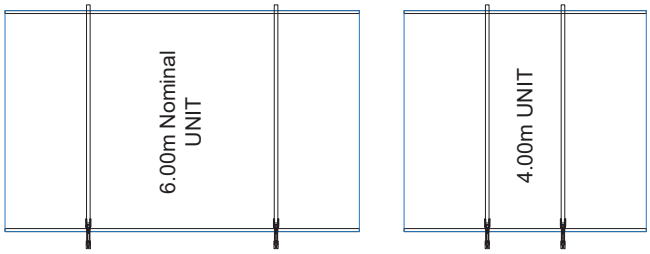


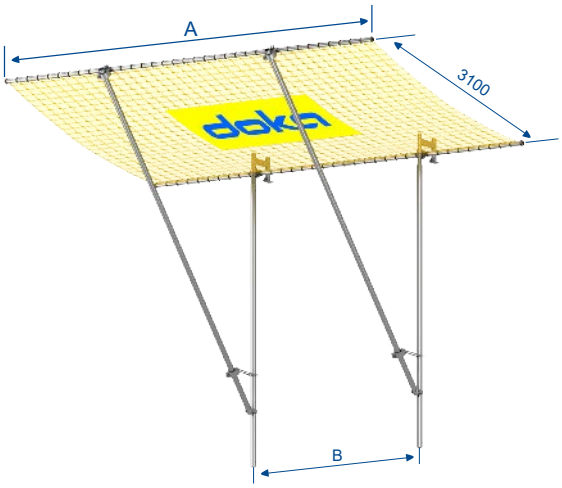

Standard Type				
Body Type	Width	A	B	Weight *
2.75m	3.10m	5.85m	3.5m±0.25	105 kg
2.75m	3.10m	4.00m	1.65m±0.25	95 kg
3.25m	3.10m	5.85m	3.5m±0.25	110 kg
3.25m	3.10m	4.00m	1.65m±0.25	100 kg

* Approx. weight of complete unit with slab attachment and extension leg.

Extra Wide Type

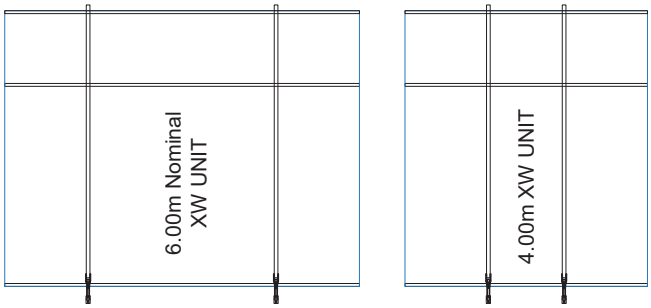




Extra Wide Type				
Body Type	**Width**	**A**	**B**	**Weight ***
2.75m	4.70m	5.85m	3.5m±0.25	125 kg
2.75m	4.70m	4.00m	1.65m±0.25	115 kg
3.25m	4.70m	5.85m	3.5m±0.25	130 kg
3.25m	4.70m	4.00m	1.65m±0.25	120 kg

* Approx. weight of complete unit with slab attachment and extension leg.


System overview

Standard Type

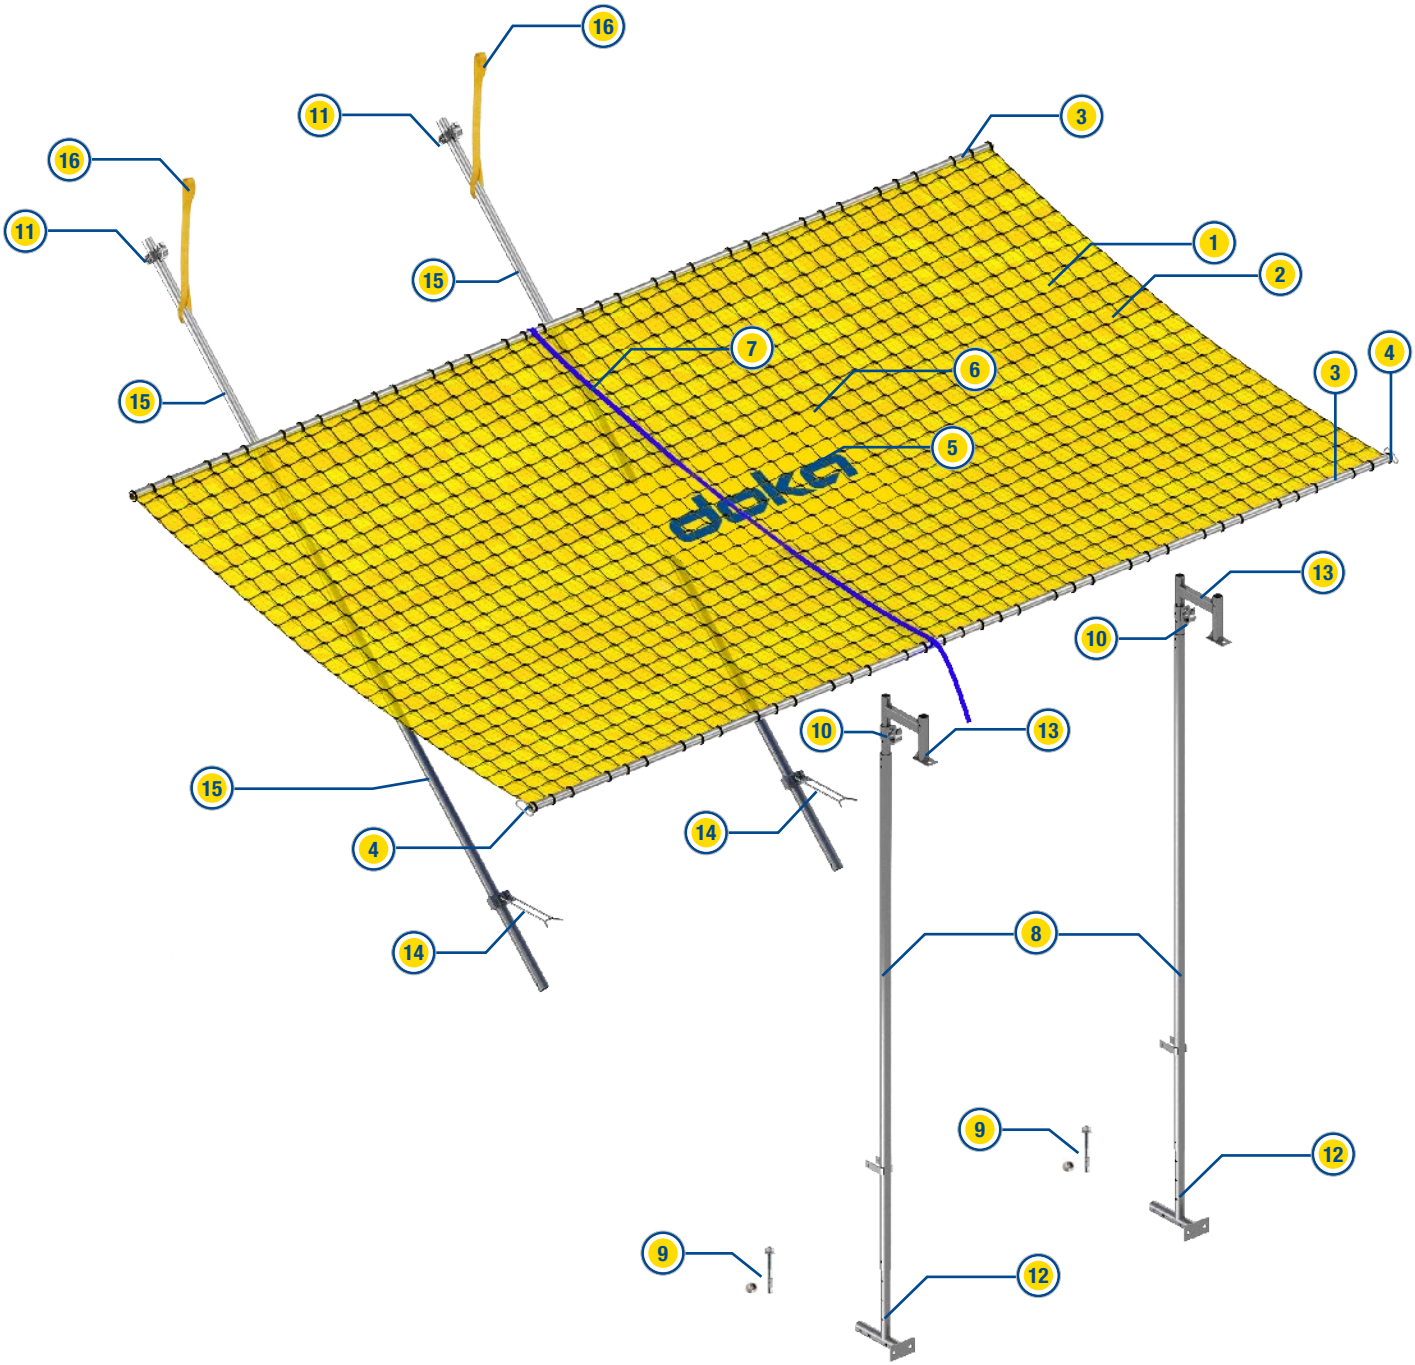


Pos.	Item No.	Description	Quantity	weight(Kg)
1	834021903	Double layer net 3.12x6.30m SNF	1	11.00
1	834021904	Double layer net 3.12x4.20m SNF	1	8.00
2	834021907	Debris net 3.00x6.50m SNF	1	0.20
2	834021908	Debris net 3.00x4.50m SNF	1	0.20
3	834021901	Horizontal tube 5.85m SNF	2	9.60
3	834021902	Horizontal tube 4.00m SNF	2	6.60
4	TSFK6X60	Karabinar 6X60	4	0.02
5	834021910	Doka Logo SNF	1	0.08
6	834021909	Cable tie SNF	50	0.15
7	834021912	Folding rope 4.50m SNF	1	0.20
8	834022020	Body 3.25m SNF	2	17.30
8	834022010	Body 2.75m SNF	2	14.50
9	834025070 / 834029003	Anchor bolt M12x120 SNF + Hexagon nut M12 SNF	2	0.11
10	834024010	Coupler adjustable SNF	2	1.00
11	834024020	Double coupler 48/60mm SNF	2	1.00
12	834022040	Extension leg 0.75m SNF *	2	3.20
12	834022030	Extension leg 1.50m SNF *	2	6.40
13	834023030	Slab attachment SNF *	2	5.20
14	834024040	Wind lock SNF	2	1.80
15	834025010	Diagonal tube 4.25m SNF	2	7.90
16	834025060	Lifting sling SNF	2	0.10
17	834023030	Slab attachment flat SNF *	2	2.70
18	834023050	Knee brace SNF *	2	7.65

* **M12x90 Bolt + M12 Nylock Nut** are already attached on the respective standard components

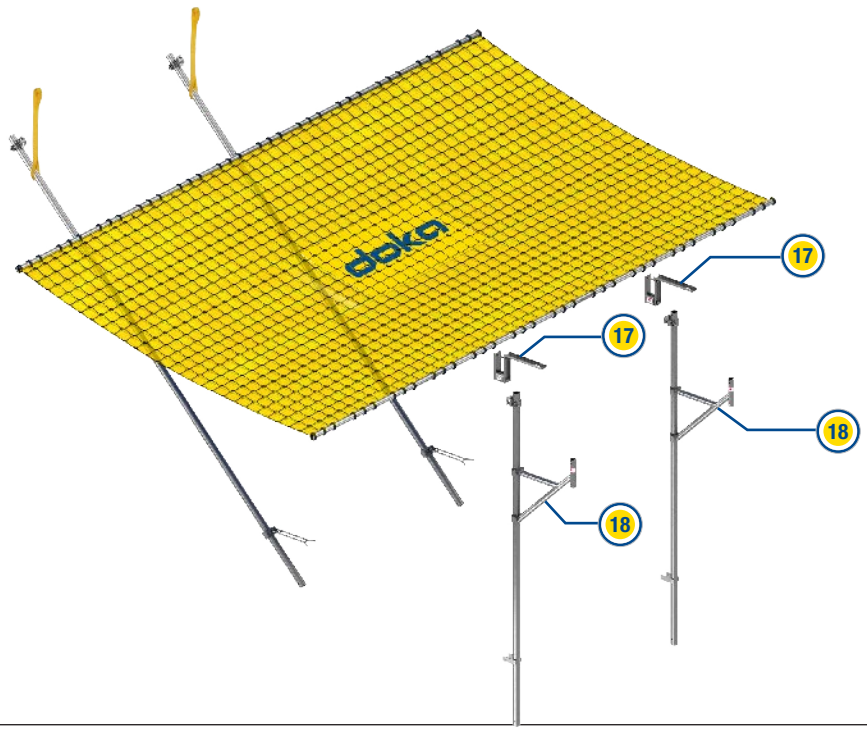


Extra wide type

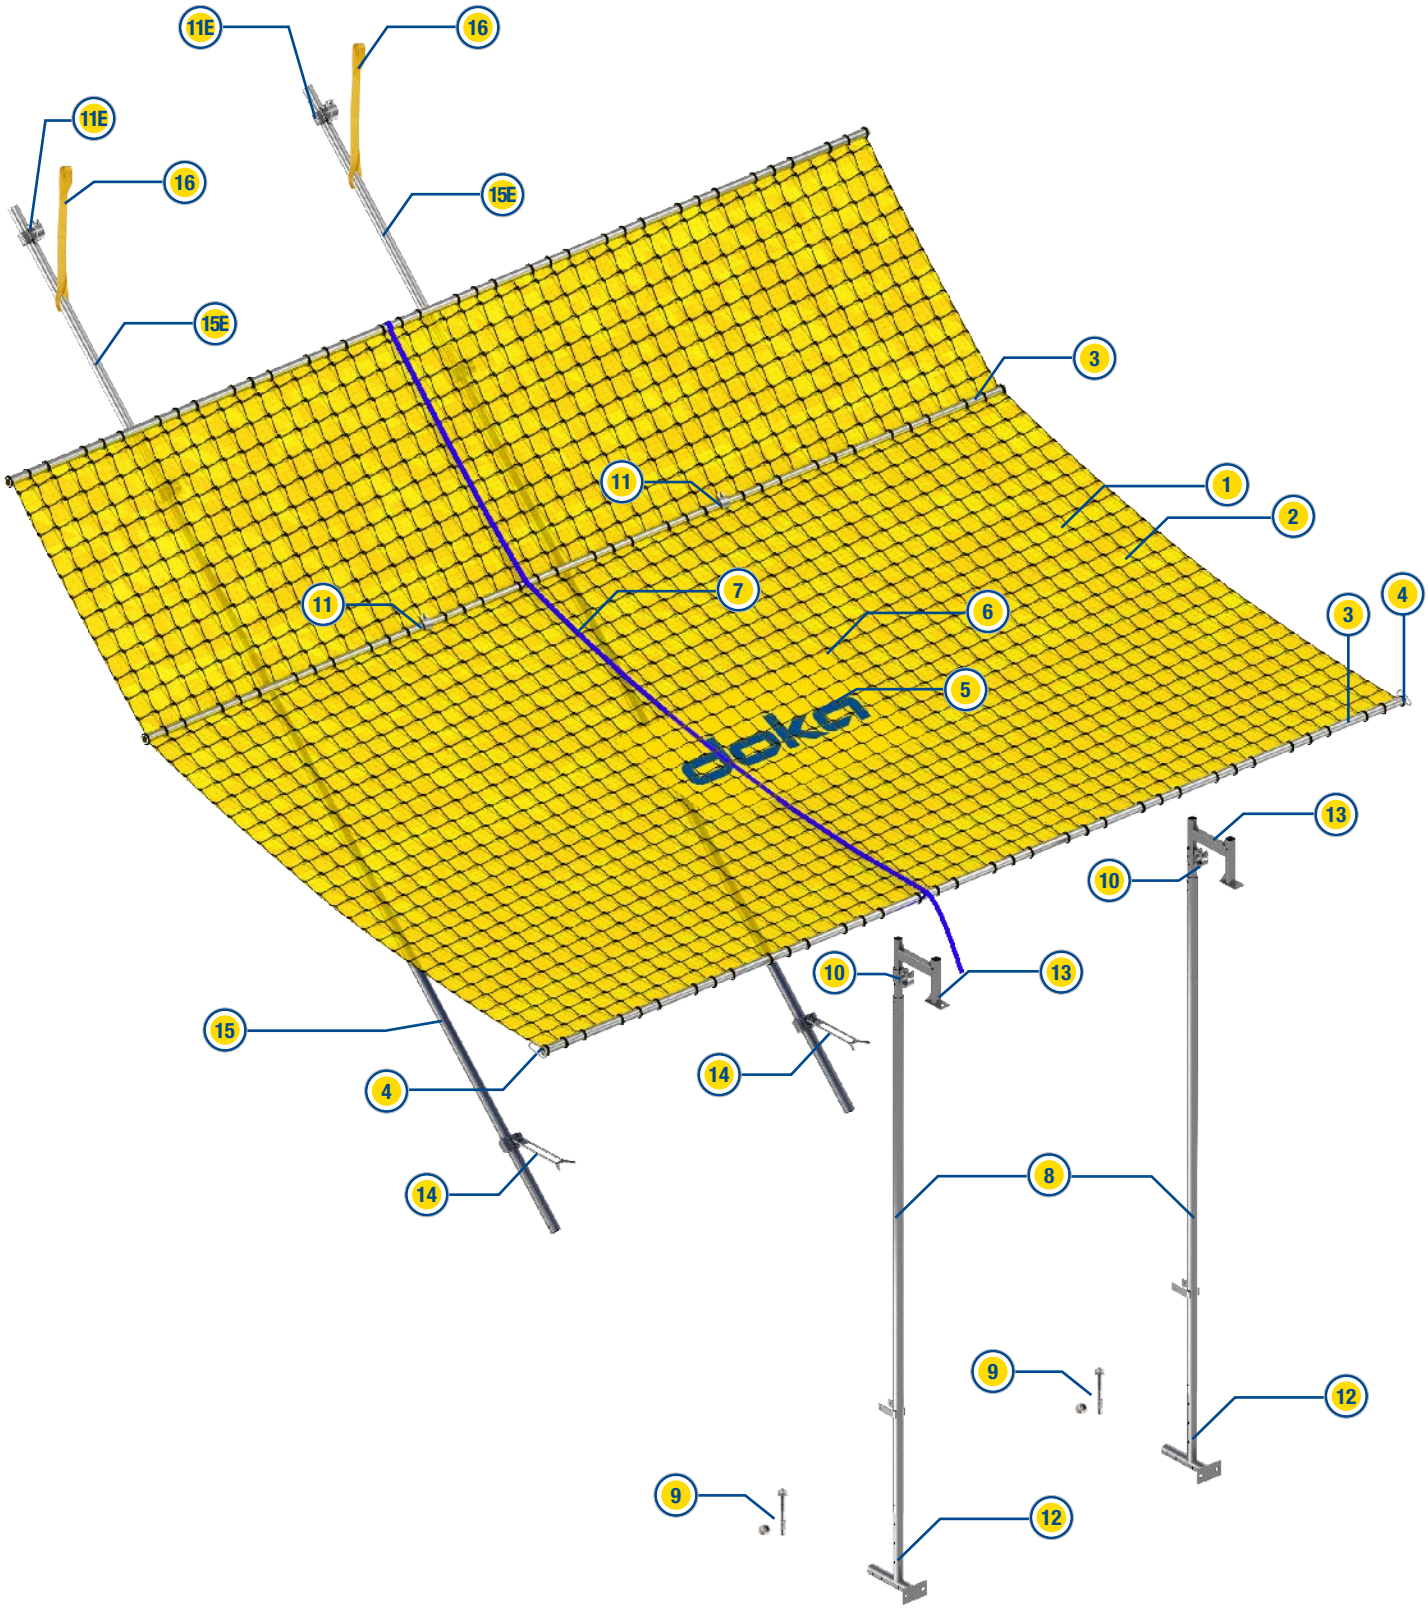

Pos.	Item No.	Description	Quantity	weight(Kg)
1	834021905	Double layer net 4.80x6.30m SNF	1	11.00
1	834021906	Double layer net 4.80x4.20m SNF	1	8.00
2	834021907	Debris net 3.00x6.50m SNF	1	0.20
2	834021908	Debris net 3.00x4.50m SNF	1	0.20
3	834021901	Horizontal tube 5.85m SNF	3	9.60
3	834021902	Horizontal tube 4.00m SNF	3	6.60
4	TSFK6X60	Karabinar 6X60	6	0.02
5	834021910	Doka Logo SNF	1	0.08
6	834021909	Cable tie SNF	50	0.15
7	834021912	Folding rope 4.50m SNF	1	0.20
8	834022020	Body 3.25m SNF	2	17.30
8	834022010	Body 2.75m SNF	2	14.50
9	834025070 / 834029003	Anchor bolt M12x120 SNF + Hexagon nut M12 SNF	2	0.11
10	834024010	Coupler adjustable SNF	2	1.00
11	834024020	Double coupler 48/60mm SNF	2	1.00
11E	834024030	Double coupler 48/48mm SNF	2	1.00
12	834022040	Extension leg 0.75m SNF *	2	3.20
12	834022030	Extension leg 1.50m SNF *	2	6.40
13	834023030	Slab attachment SNF *	2	5.20
14	834024040	Wind lock SNF	2	1.80
15	834025010	Diagonal tube 4.25m SNF	2	7.90
15E	834025020	Diagonal tube extension SNF	2	2.86
16	834025060	Lifting sling SNF	2	0.10
17	834023030	Slab attachment flat SNF *	2	2.70
18	834023050	Knee brace SNF *	2	7.65

* **M12x90 Bolt + M12 Nylock Nut** are already attached on the respective standard components

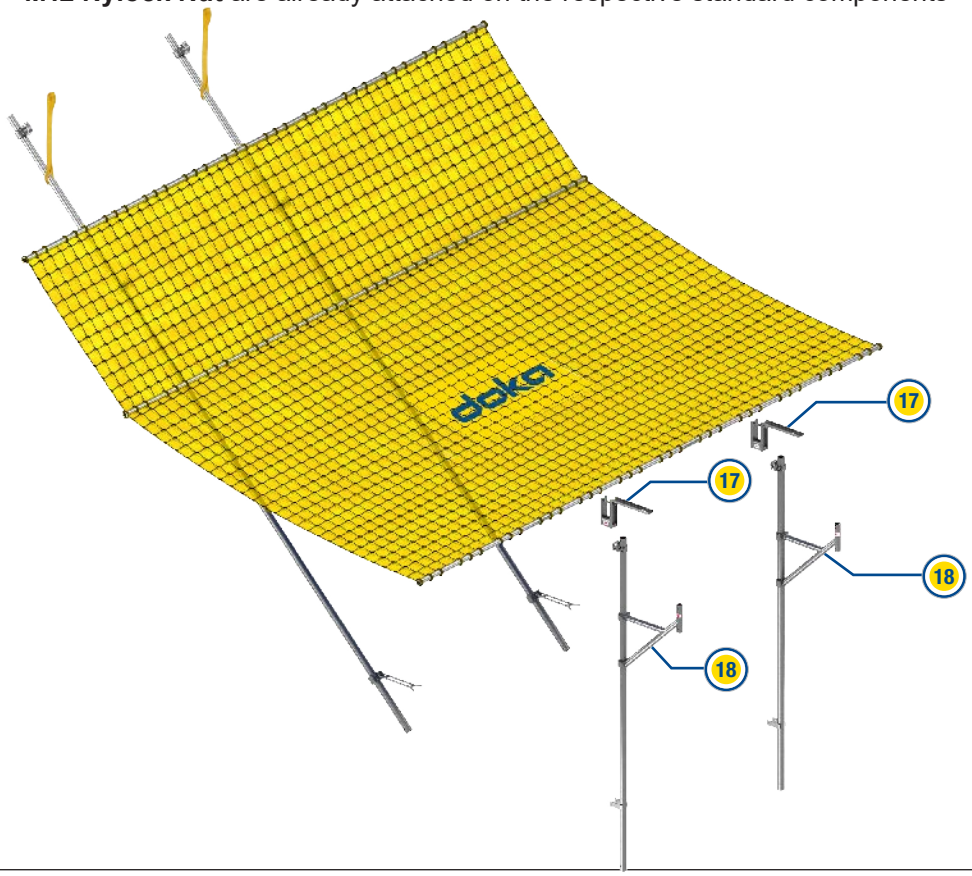

Required Tools For Assembly

Ratchet Spanners 19mm / 21mm



Spanners 19mm / 21mm



Measuring Tape



Marker Pen



Hammer



Assembly Stool [2 pcs.]



All operatives involved must wear necessary Personal Protection Equipment (PPE) suitable for the job and environment and are trained and competent for this task.

Prior to assembling the Fans on site, ensure that an even and clean area 7m x 10m in dimension is allocated to this operation allowing ample additional space for stacking of assembled Fans.

Assembly area must NOT be below any operation where there may be risk of falling debris.


Installation team must also ensure that assembly area is accessible by site crane for moving into location.

Anchoring to the structure

Installation guide



1. Drill a hole and clear it from drilling dust and debris (using blowpump or equivalent method)
2. Lightly tap the throughbolt through the fixture into hole with a hammer, until fixing depth is reached
3. Tighten to the required torque

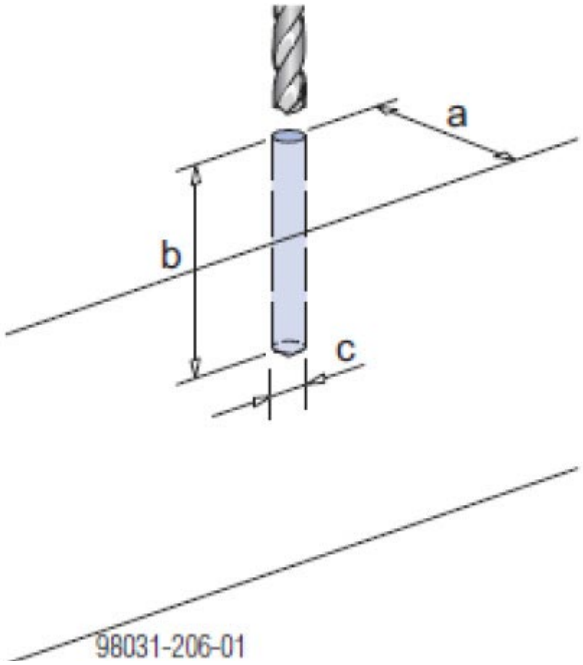

a Distance from edge min. 100 mm
b Depth of drilled hole min. 100 mm
c Diameter of drilled hole 12 mm
d Minimum slab thickness 150 mm
Installation torque min. 50 Nm


Required design load capacity of the anchor bolts:
- Tensile force: 13.90 kN
- Shear force: 9.40 kN

e.g. Rawlplug Throughbolt R-XPT-12120/25 (European approval ETA-08/0339) – in uncracked concrete C20/25, or equivalent products from other manufacturers.


Step by step Installation

Step 1:
Lacing nets into horizontal tubes


Lace the inner and outer Horizontal tubes in to the safety net units, ensuring the tube is fed every second mesh as indicated.
For ease of assembly ensure that the 20x20 net portion is facing downward.

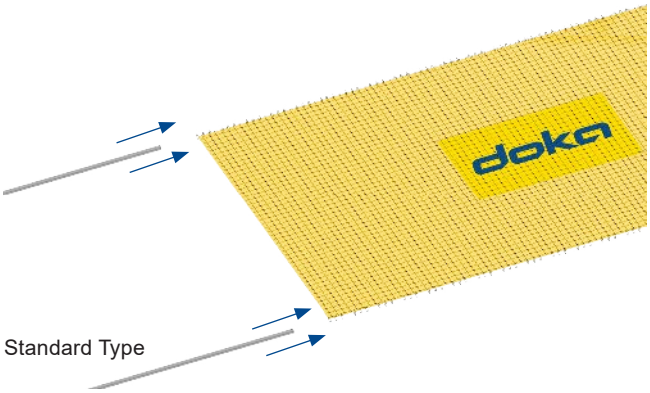


Standard Type

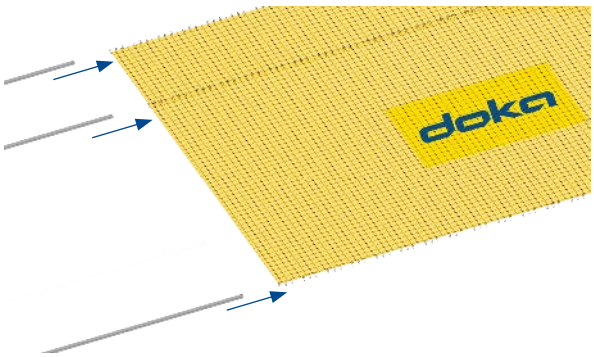

Extra Wide Type

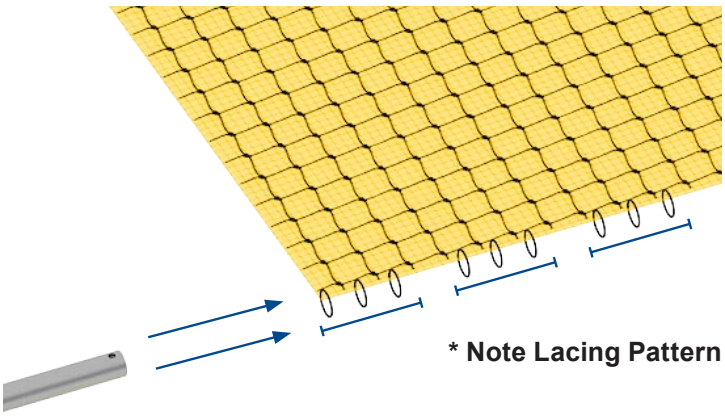



*** Note Lacing Pattern**

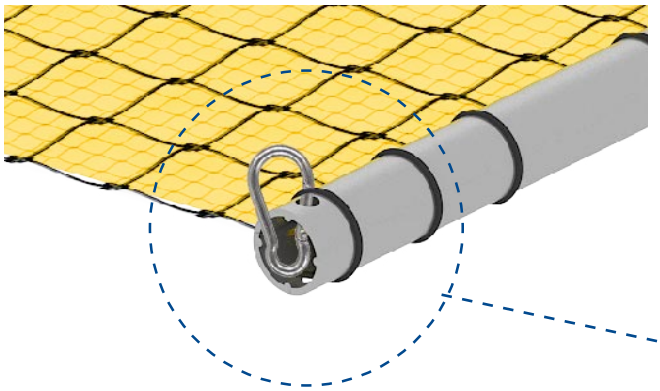


Secure the ends of the Nets using a steel Karabiner or similar.

Karabiner is fed through the pre-drilled hole on Horizontal tube ends.

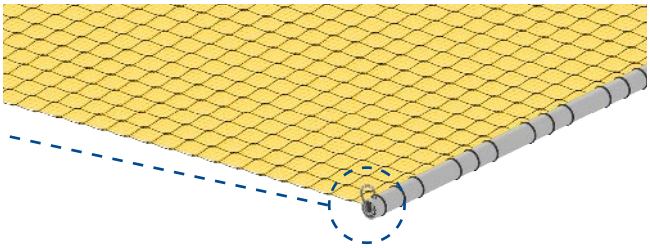


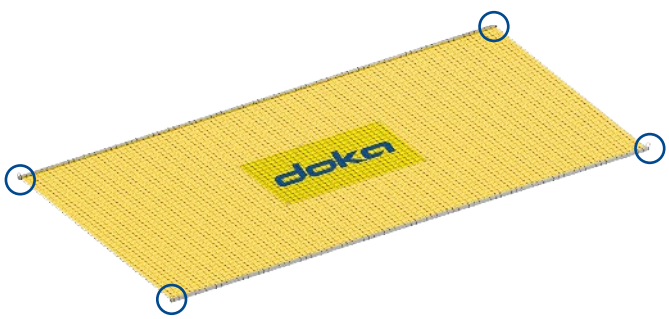


Ensure that all four corners (six corners on Extrawide Fans) are secured with Karabiners as indicated.

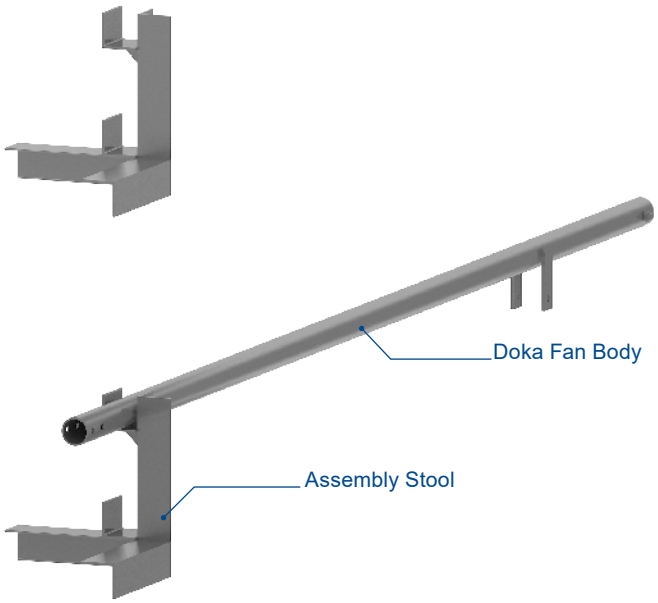

Step 2: Place the Doka Fan Body within the upper housing section of the Assembly Stool. Ensure that the housing brackets for the diagonal tube is facing down.

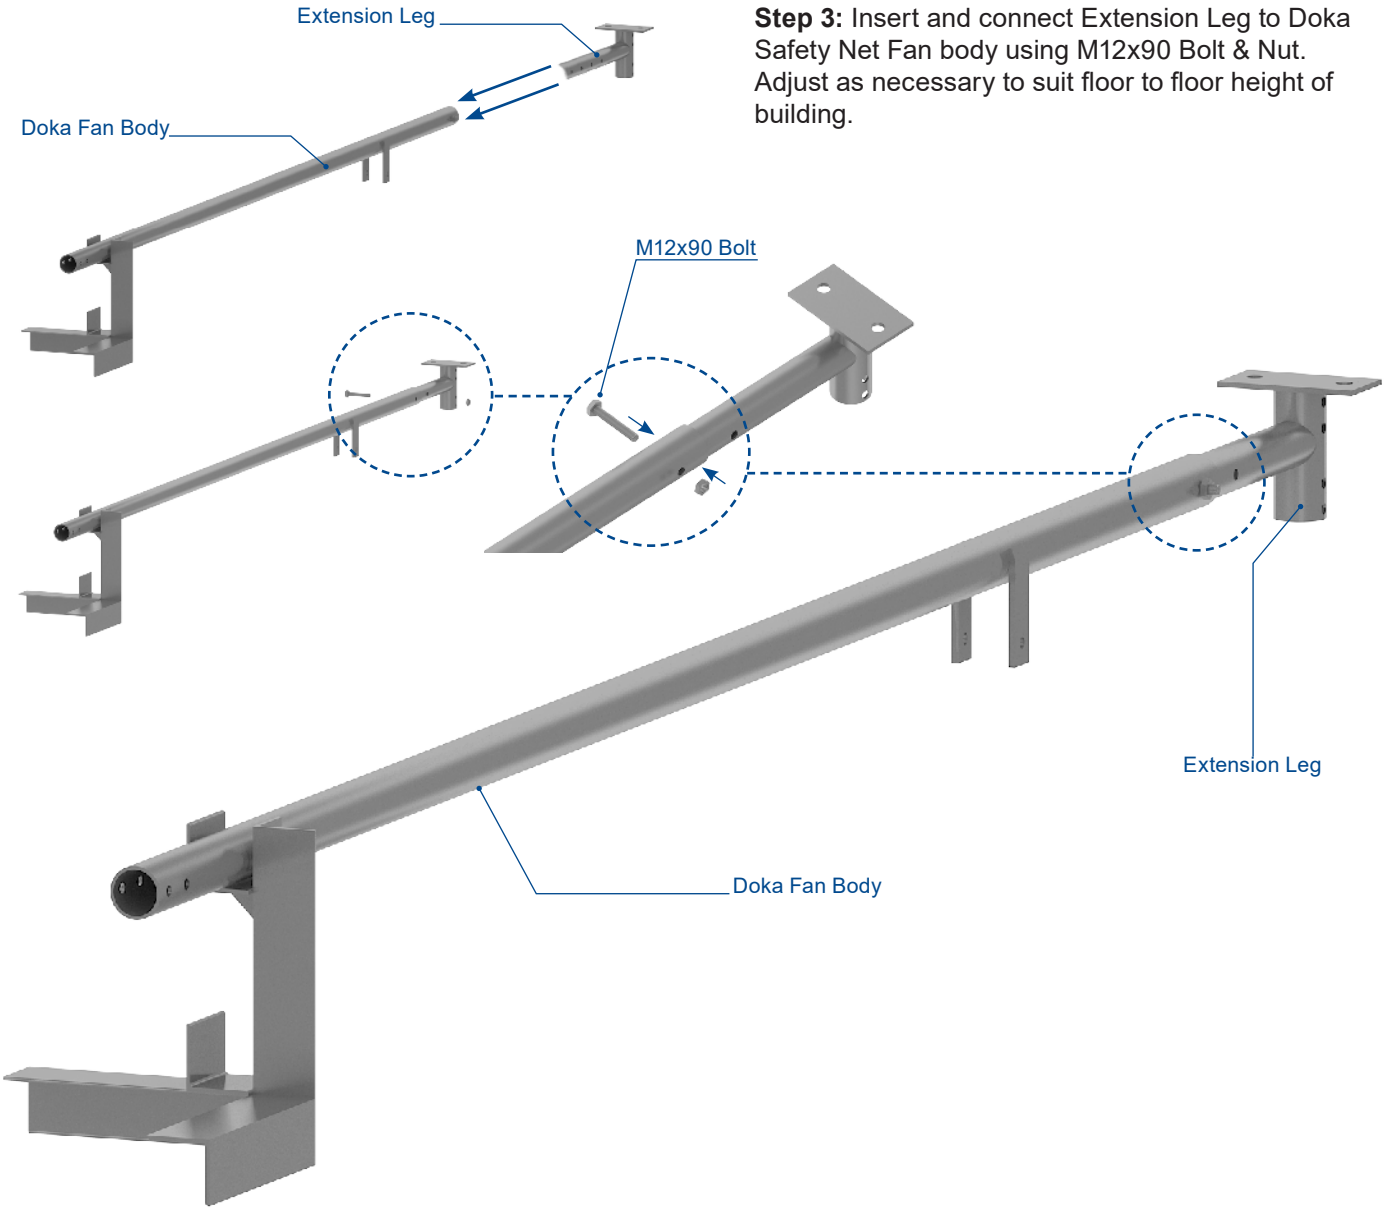


Step 3: Insert and connect Extension Leg to Doka Safety Net Fan body using M12x90 Bolt & Nut. Adjust as necessary to suit floor to floor height of building.

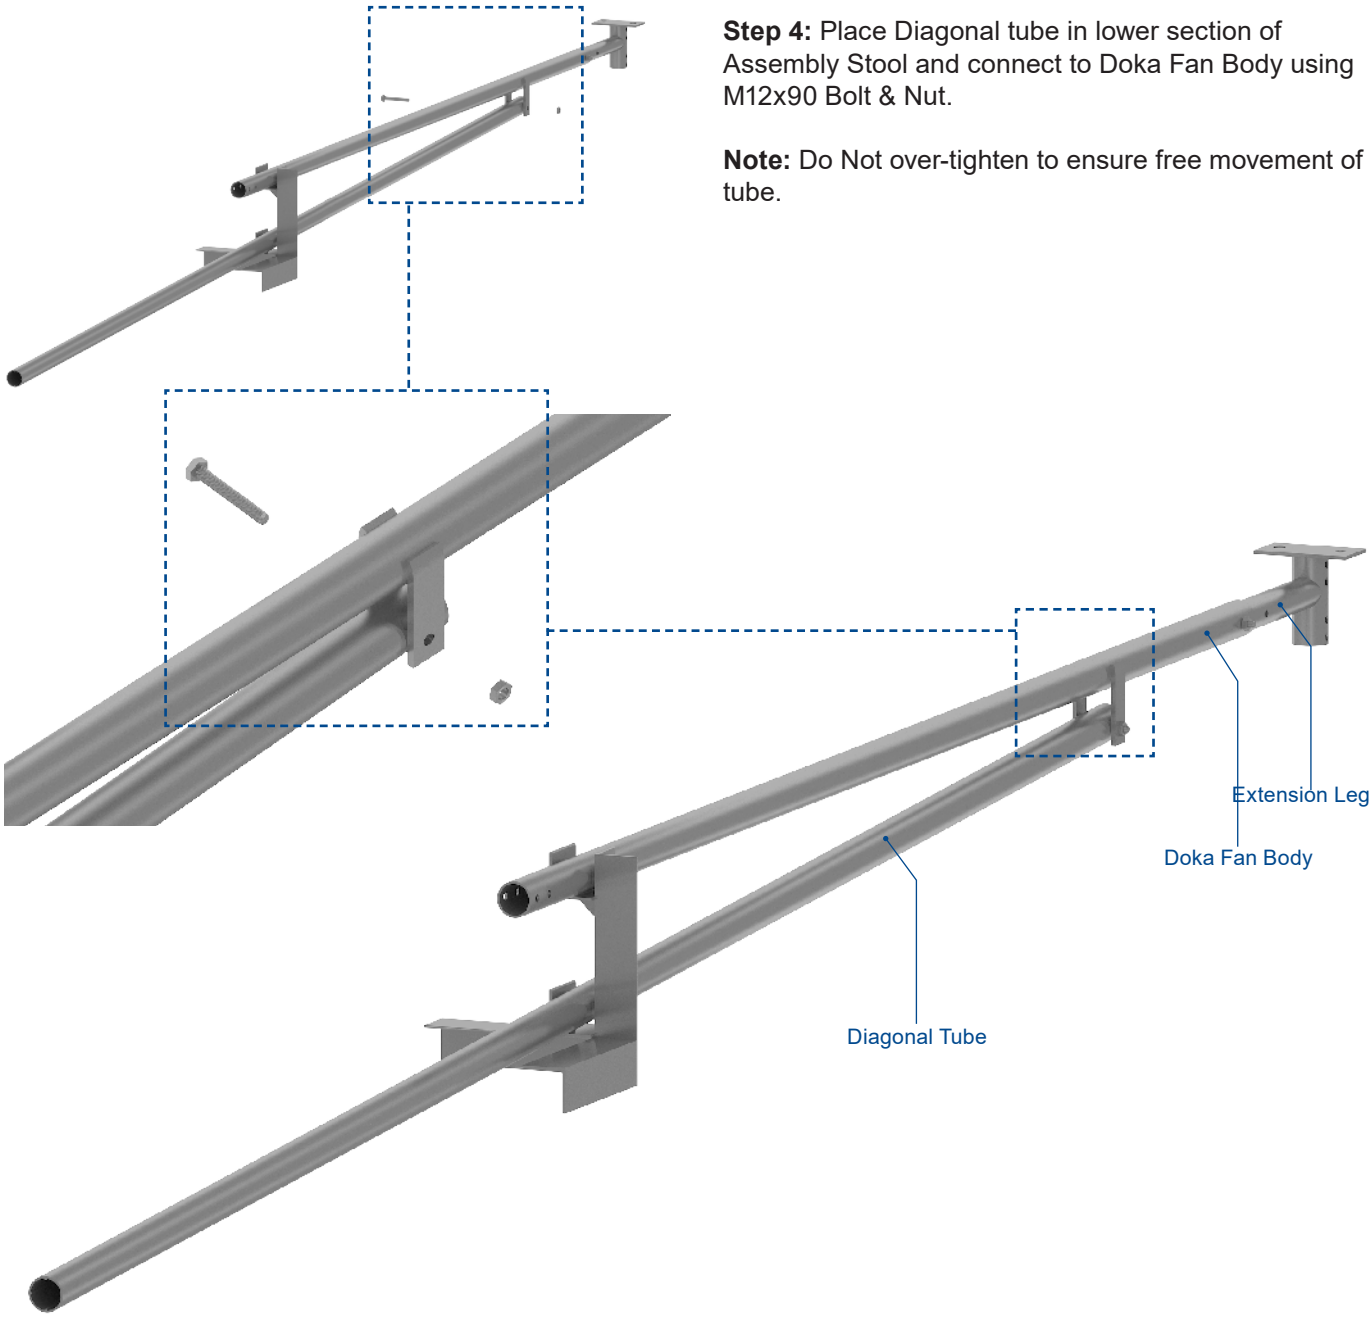


Step 4: Place Diagonal tube in lower section of Assembly Stool and connect to Doka Fan Body using M12x90 Bolt & Nut.


Note: Do Not over-tighten to ensure free movement of tube.

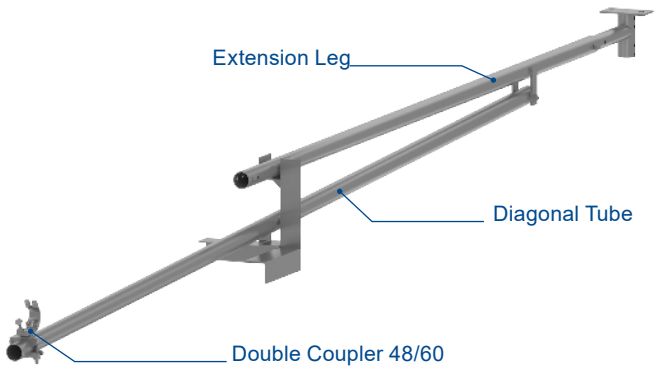


Step 5: Connect 48/60 Double Couplers to Diagonal Tube at 50mm from tube end.

Note: Ensure verticality when connecting coupler and note direction of coupler opening.

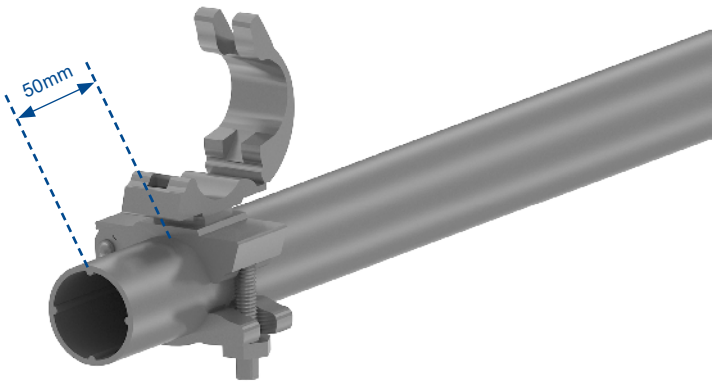

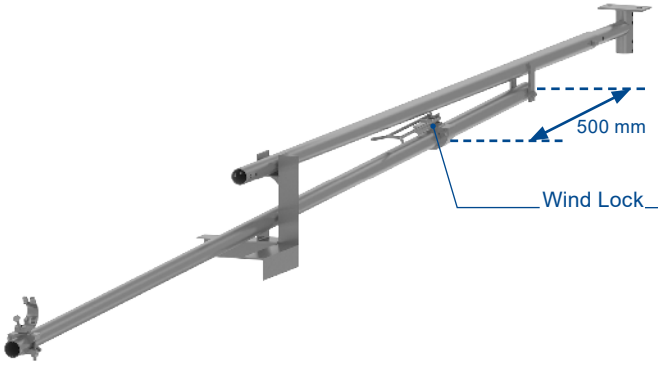

Step 6: Position Wind Lock and connect to diagonal tube. Note direction of wind lock and note dimension from end of diagonal tube.

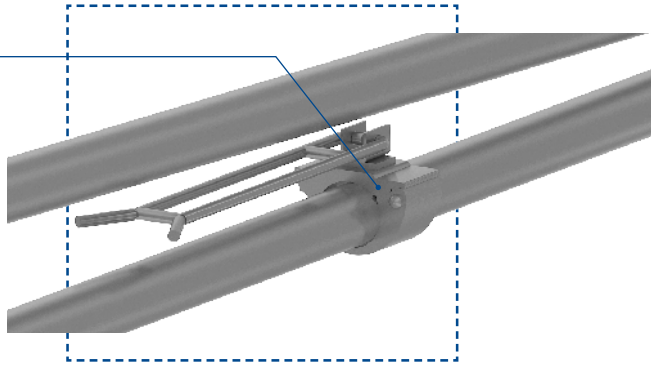

Standard Type


Step 7: Connect 48/60 Double Couplers to Diagonal Tube at 50mm from tube end.

Note: Ensure verticality when connecting coupler and note direction of coupler opening.

Extra Wide Type

Step 7(XW): Connect 48/48 Double Couplers to Diagonal Tube at 50mm and 1600mm from tube end.

Note: Ensure verticality when connecting coupler and note direction of coupler opening.

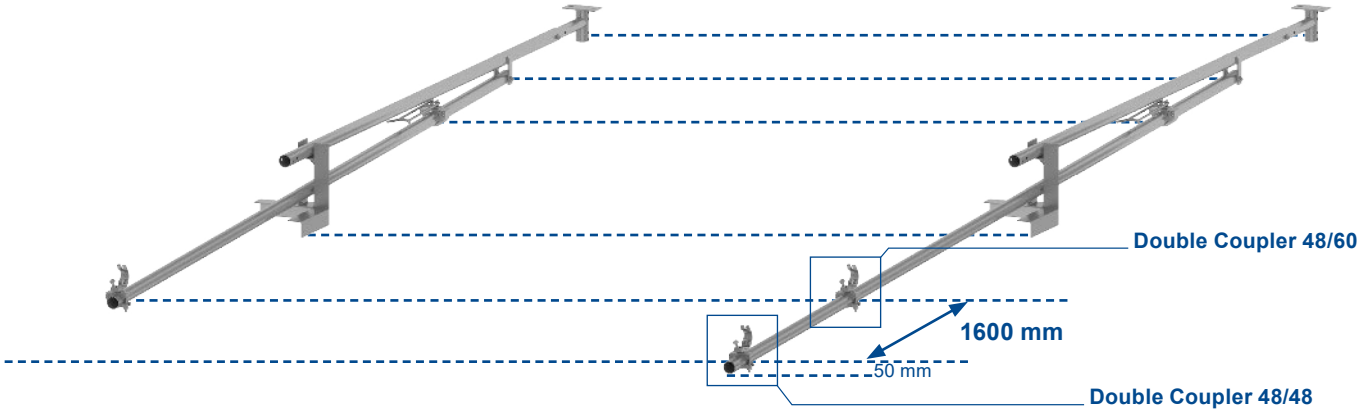

Standard Type


Extra Wide Type


Step 8: Repeat steps 2-5 for second leg placing the assembly at correct spacing.
Refer to Dimension Section of this guide for spacing. (3.5m apart for 6.00m Units and 1.65m for 4.00m Units).


Note: Body spacing may be adjusted by ±150mm from project to project .

Step 8(XW): Repeat steps 2-5 for second leg placing the assembly at correct spacing.
Refer to Dimension Section of this guide for spacing. (3.5m apart for 6.00m Units and 1.65m for 4.00m Units).

Note: Body spacing may be adjusted by ±150mm from project to project.

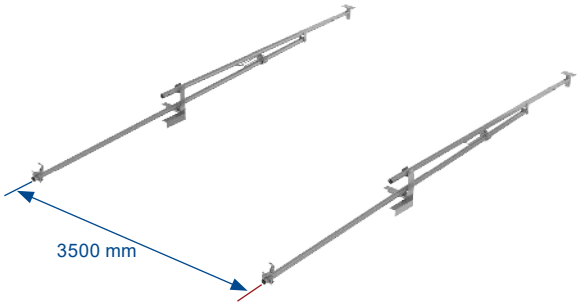


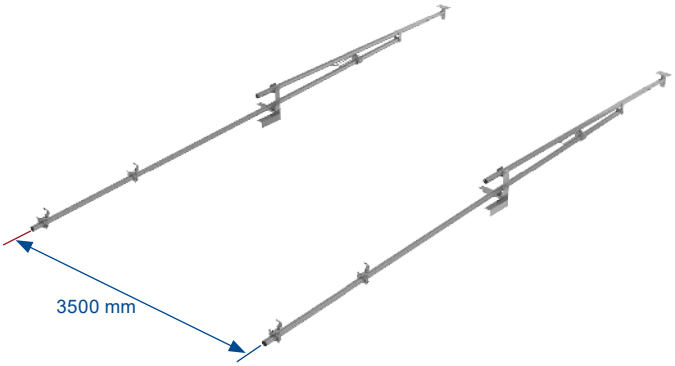

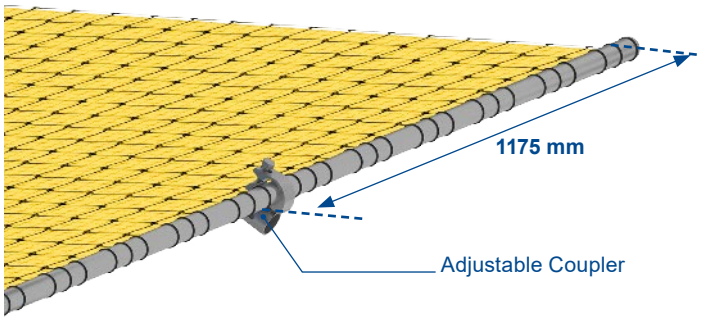


Step 9: Place and connect Adjustable coupler at correct distance from end of Inner Horizontal tube (1175mm). Refer to Dimension Section of this guide for more details.

Note: Do Not fully tighten the coupler at this stage.

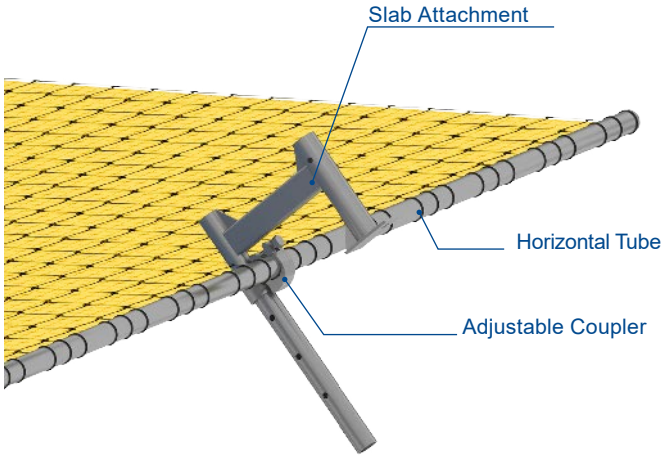


Step 10: Insert Slab Attachments into Adjustable Couplers on both sides and offer into the top of the Doka Fan Body.

Note: Ensure logo is at the bottom and 20x20 layer is on top.

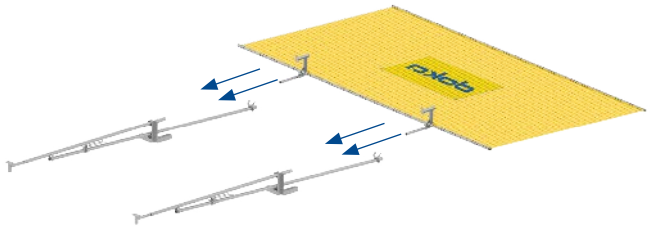


Step 11: Insert and connect the Slab attachment into the Doka Fan Body using M12x90 Bolt & Nut. Adjustable coupler must be fully tightened at this stage.

Note: Slab Attachment may be bolted to Doka Safety Net Fan Body using various pre-drilled holes to suit floor/floor height of the building.

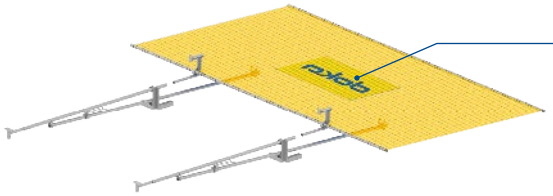

Note: Direction of logo to be placed under.

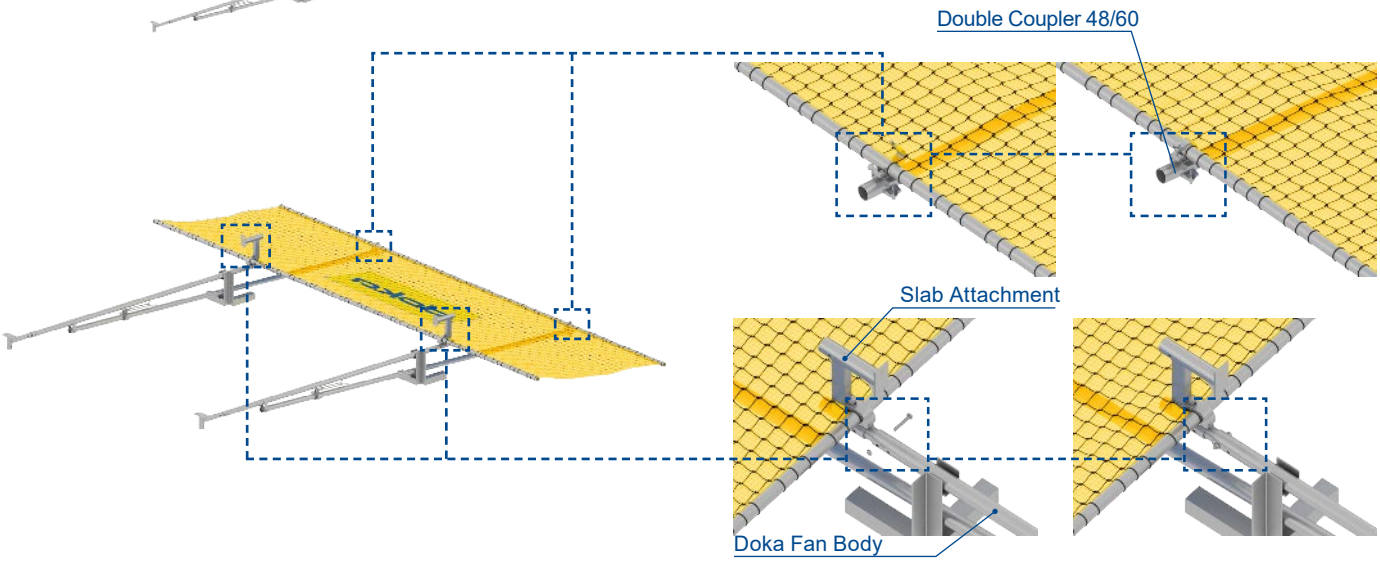


Extra Wide Application


Step 11(XW): Insert and connect the Slab attachment into the Doka Fan Body using M12x90 Bolt & Nut. Adjustable coupler must be fully tightened at this stage.

Note: Slab Attachment may be bolted to Doka Fan Body using various pre-drilled holes to suit floor/floor height of the building.

Step 12(XW): Place outer Horizontal tube in 48/48 Double couplers on both sides at correct distance (1175mm) from the ends and fully tighten the coupler. Refer to Dimension Section of this guide for more details.

Note: Ensure squareness and verticality of the connection and ensure that no net cord is caught inside the coupler.

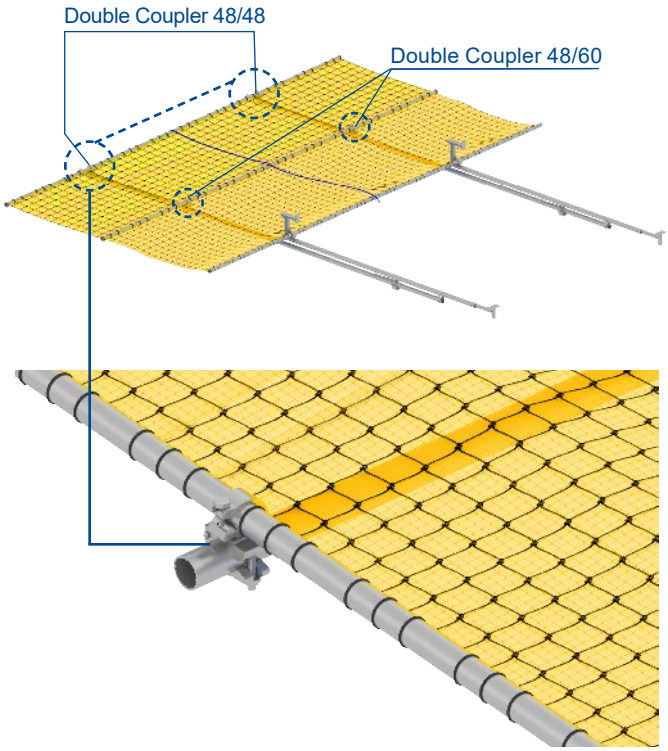

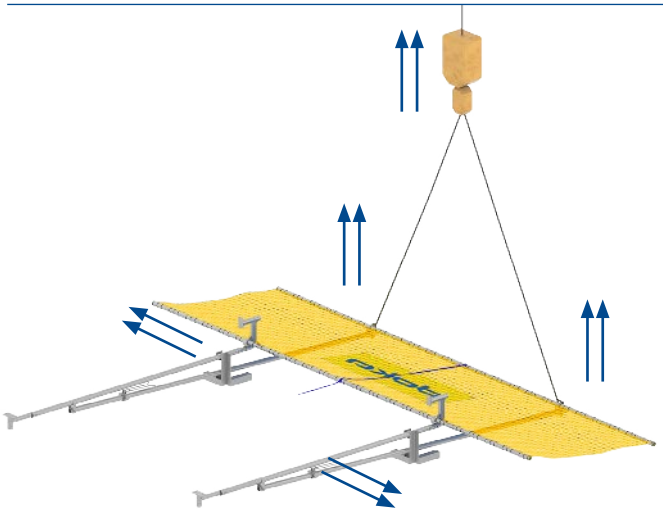

Step 13: Connect lifting sling to Crane and lift Doka Fan unit in a controlled manner. Ensure that Assembly Stools are removed out of the way.

Note: When Doka Fan unit is in its vertical position care must be taken as the Fan unit will open up. Ensure no personnel is standing under the Unit.



Step 14: Crane the Doka Fan unit on to the slab in a controlled manner ensuring that Slab Attachments are lowered on to the slab first.

Note: Care to be taken not to expose the operatives to open edge. All operatives must be trained and competent equipped with all necessary Personal Protective Equipment.

Note: Edge Protection removed for clarity.


Step 14(XW): Crane the Extra Wide Doka Fan unit on to the slab in a controlled manner
ensuring that the inner tube is lower into the Flexi Attachment.
Flexi attachments are pre-fixed onto edge of slab prior to craning the fans.

Note: Care to be taken not to expose the operatives to open edge. All operatives must be trained and competent equipped with all necessary Personal Protective Equipment.



Step 15: Ensure that at this stage the Crane is still attached to the Fan unit and that the Fan unit is located in the correct position for connection to slab.




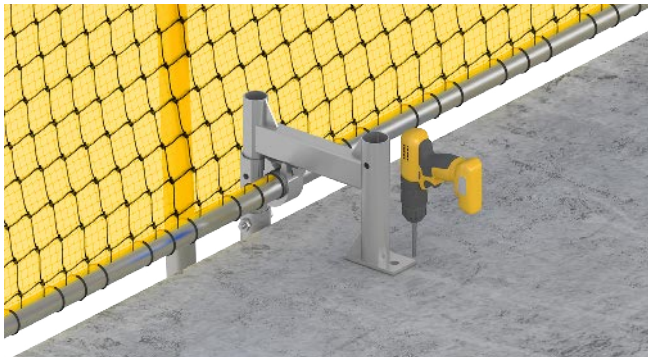



Step 16: Whilst still connected to crane with nets in a folded manner, drill through the Slab Attachment pre-allocated hole to the required depth and fix 2 No. M12 anchor bolts, one for each Slab Attachment, and tighten to ensure correct anchor engagement to the slab.


Note: Refer to Anchor Manufacturer data for depth of drilling and strength.

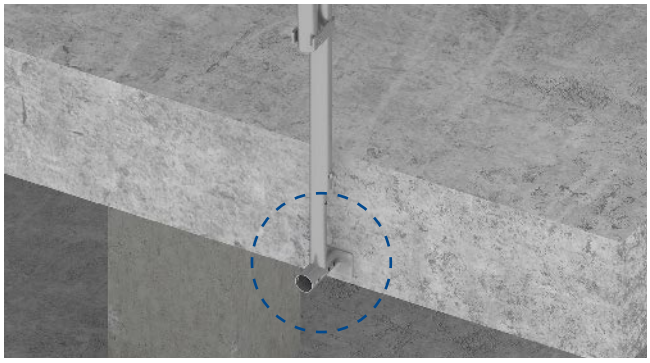


Step 16: Once both anchor bolts are fixed, the crane may be released from the Fan unit. Fan unit can now be opened in a controlled manner using the Nylon rope pre-connected to the outer tube.

Note: Ensure that wind lock is engaged.

Note: Edge Protection removed for clarity.

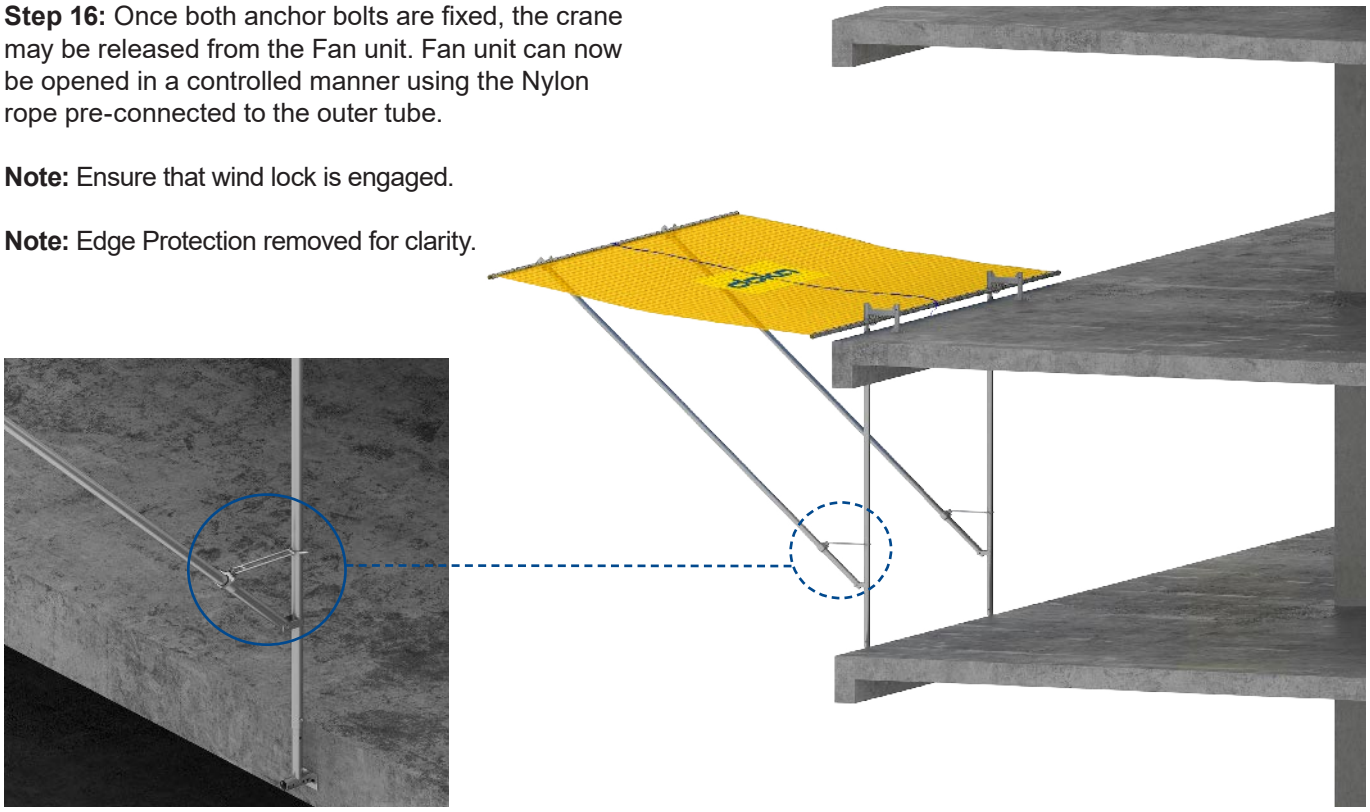


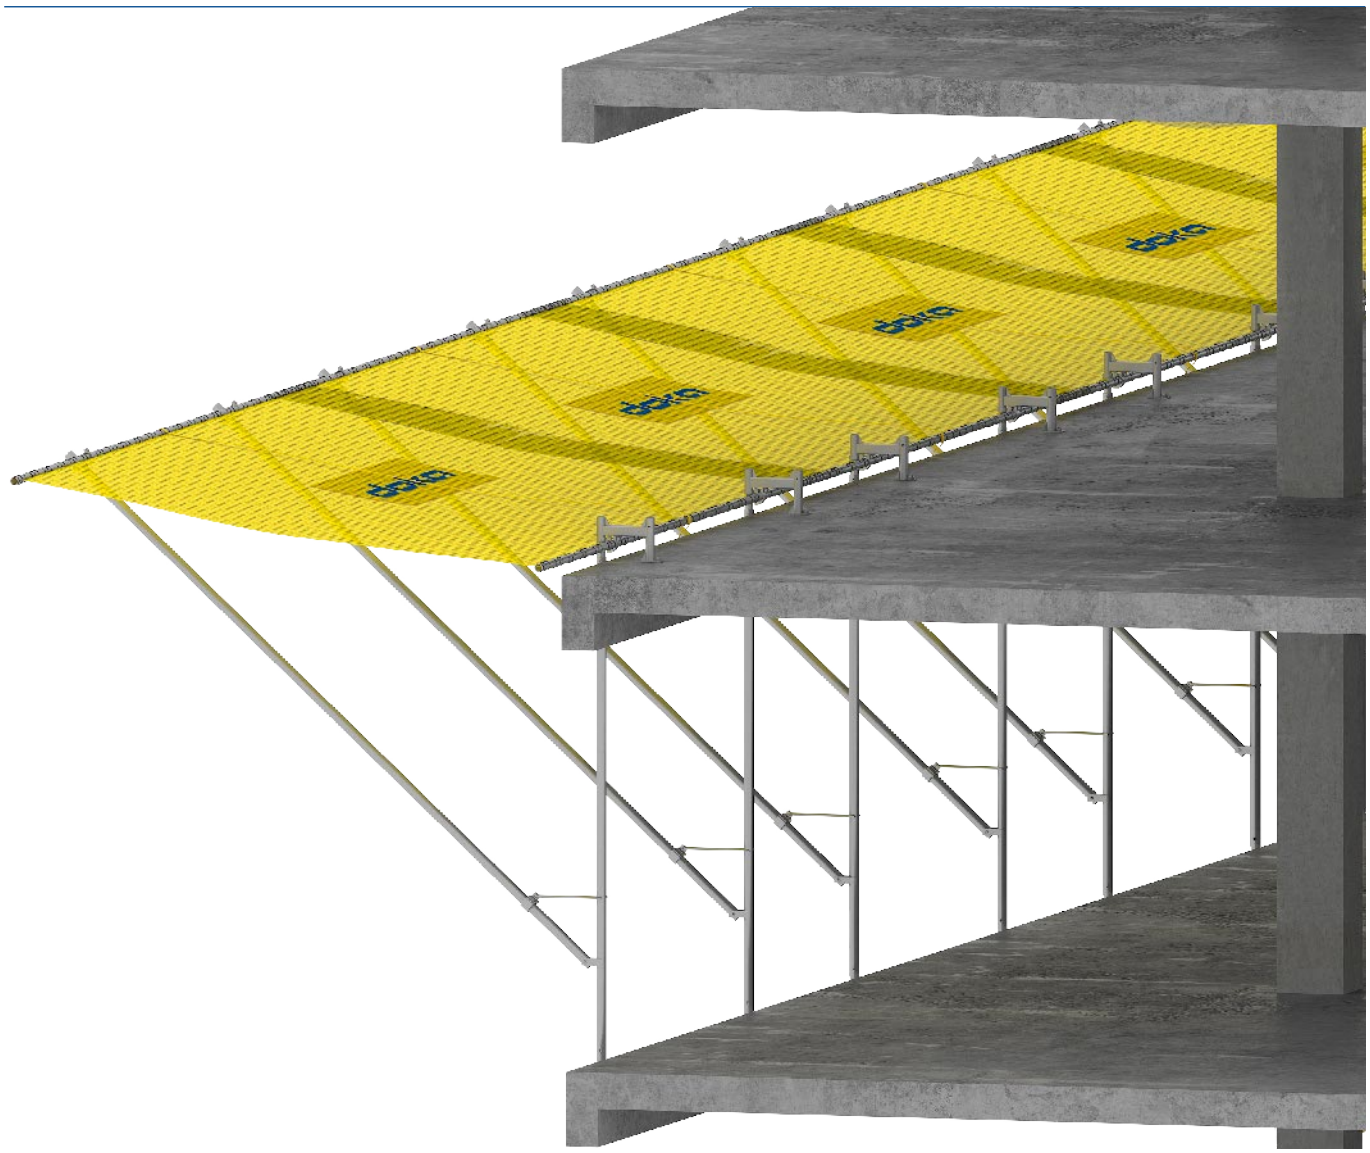


Overlap

To ensure total coverage of gaps between Doka Fan units, the Fans must either be laced together or overlapped. Using the customary method of overlap, the lower units must be installed prior to upper units as indicated in the sketch below. This method of overlap allows for easy access when folding units for craneage. The overlapping is achieved automatically using the adjustable coupler when used in conjunction with Slab attachment.

When using other attachments (Wall or Flexi attachments), the Fan units are simply stack on top of one another

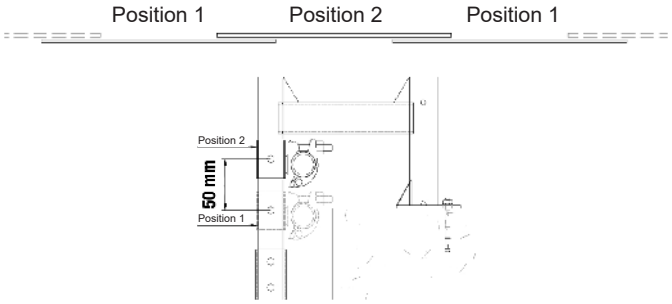


The extent of overlap between Doka Fan units determines the effective length of unit on plan.
To maintain the minimum overlap of 0.75m between Doka Fan units as required by EN-1263, it is recommended to overlap the units at 0.85m as the nets are narrower in the middle.

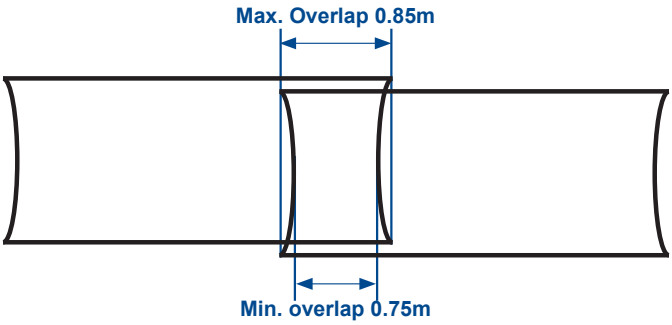



Makeup Units

When it is not possible to overlap the Doka Fan the use of a “makeup unit” will cover the empty space between them and allows a full coverage of the edge protection.

For makeup units typically the standard net unit with 4.00m length is used.
The makeup unit will be connected with 2 swivel couplers to the standard Doka Safety Net Fans on each side. A min. overlap of 1.00m on each side needs to be maintained.

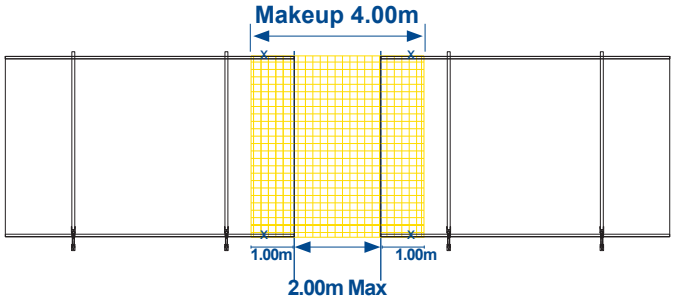

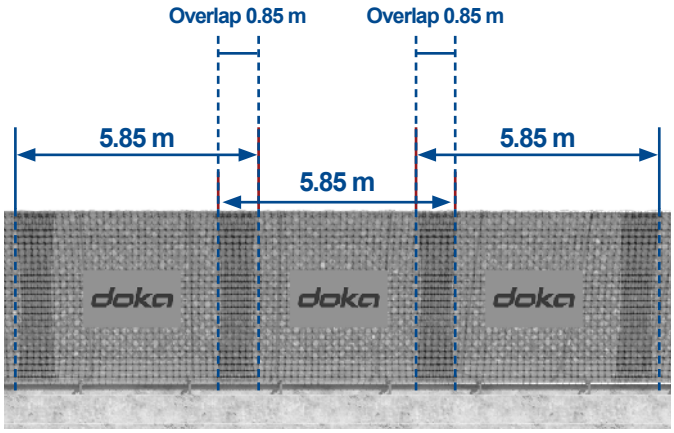

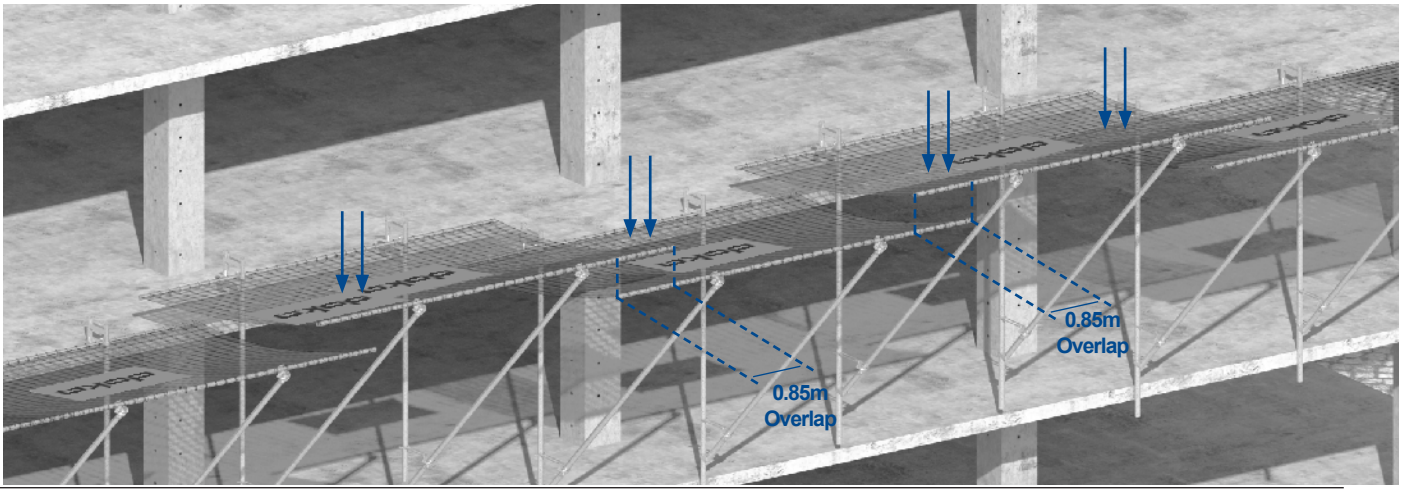



Additional area of use

Wall Attachment Application


Enables anchor connection of the Doka Fan to walls and vertical surfaces. Key hole enables pre-drilling for anchors.
Locking bolt ensures secure positioning of the Fan.




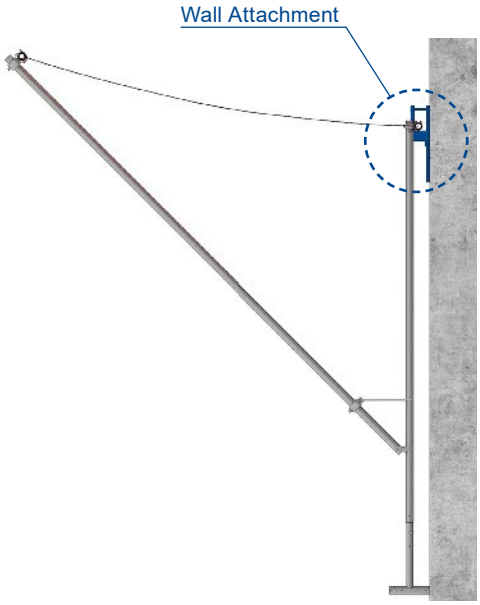

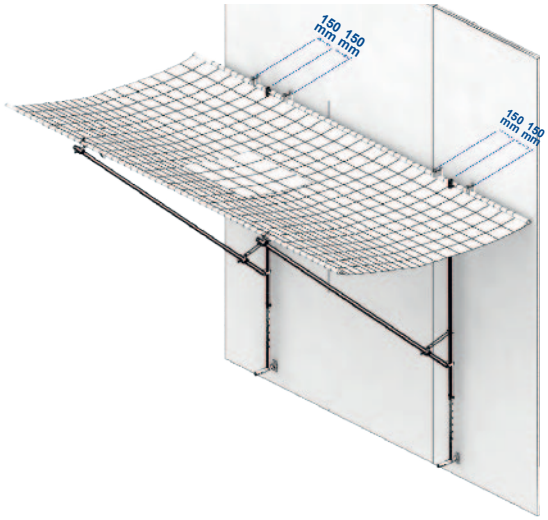


Description	Wt.(kg)
Slab attachment SNF	2.40
Bolt M12x90 SNF	0.11

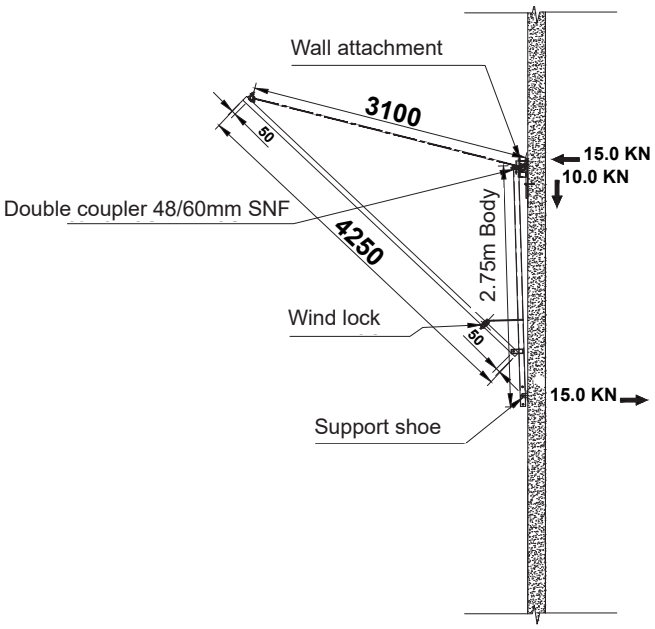

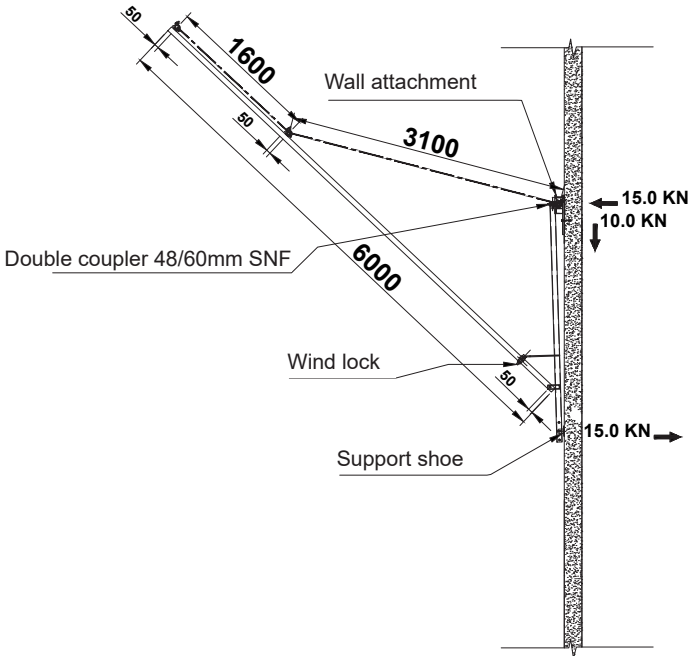


Slab Attachment Flat Application


Enables anchor connection of the Doka Fan to slabs whilst allowing block work or similar operation on the slab edge.
Flexi Attachment can be installed ahead of the Fan installation enabling speedy erection.
Locking bolt ensures secure positioning of the Fan.

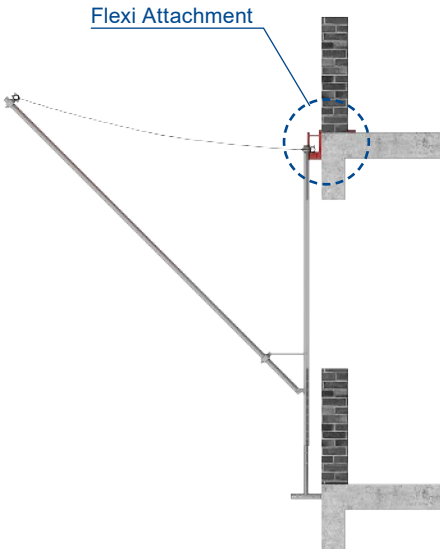





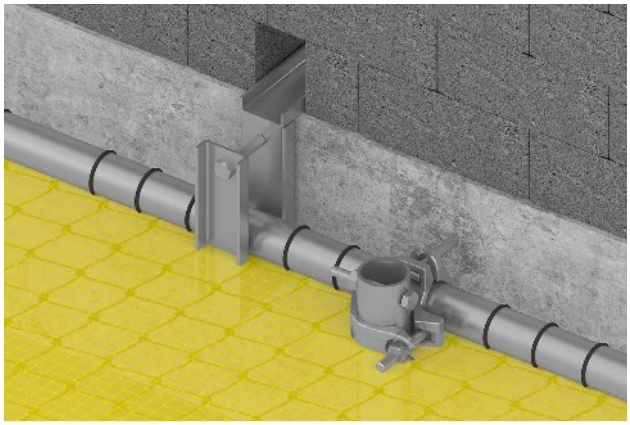

Description	Wt.(kg)
Slab attachment flat SNF	2.40
Bolt M12x90 SNF	0.11

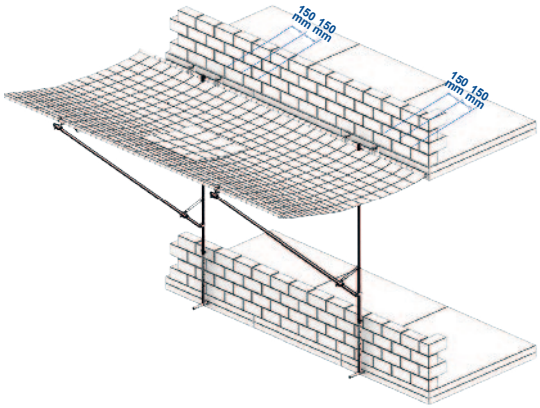

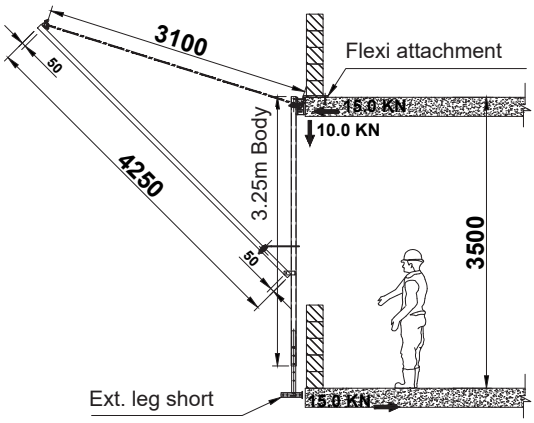


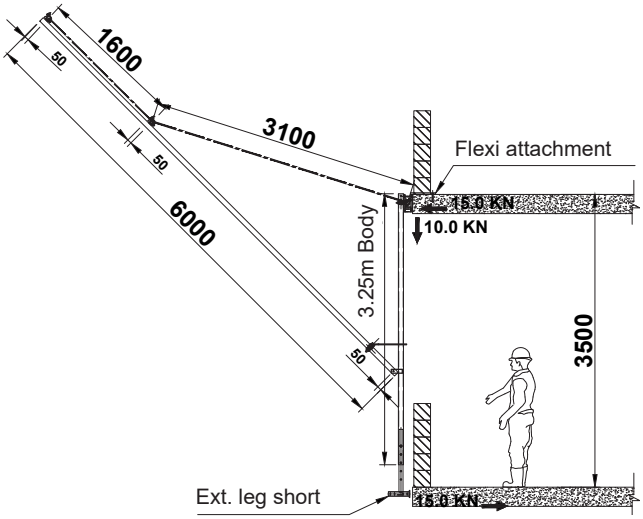


Knee Brace Attachment


Used to support the Doka Fan from the underside of the slab. Twin coupler connection provides infinite adjustment. Most suitable where floor-to-floor height exceeds the limits of the extension leg or where there are no slabs below.




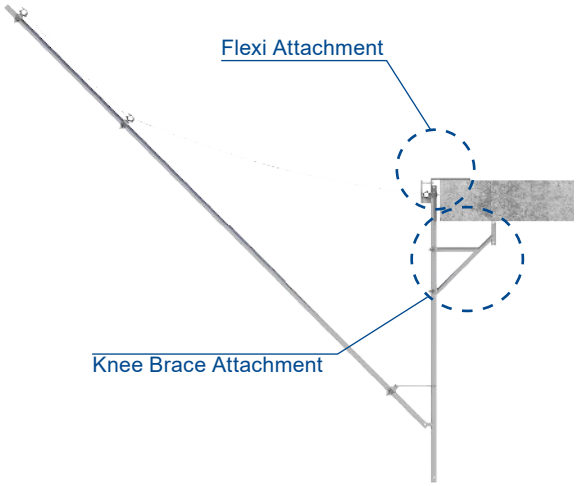

Description	Wt.(kg)
Knee brace SNF	7.10
Bolt M12x90 SNF	0.11

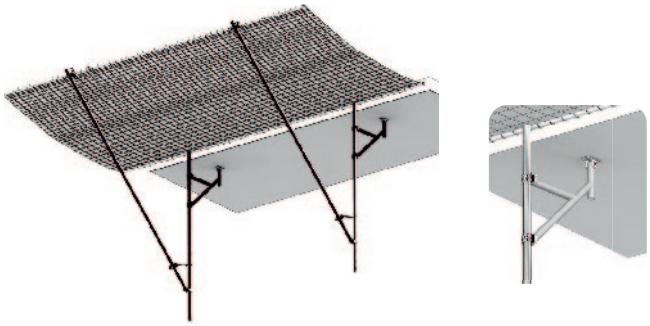

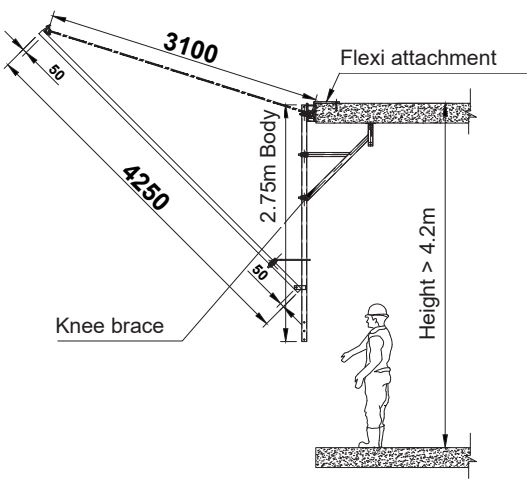


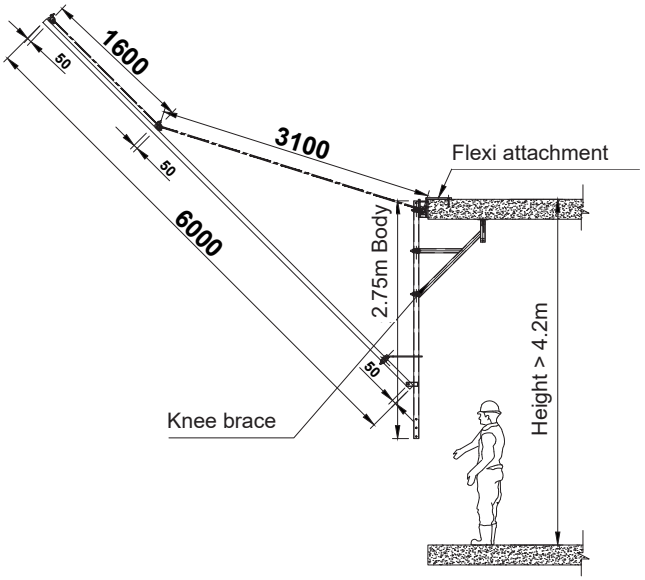


Slab Attachment


Used to mount Doka Fan on top of cast concrete slab. 16.00mm Ø,12.00mm Ø drill hole to accommodate M16 or M12 Anchor Bolt.
Socket tube enable connection of edge protection to Doka Fan unit.



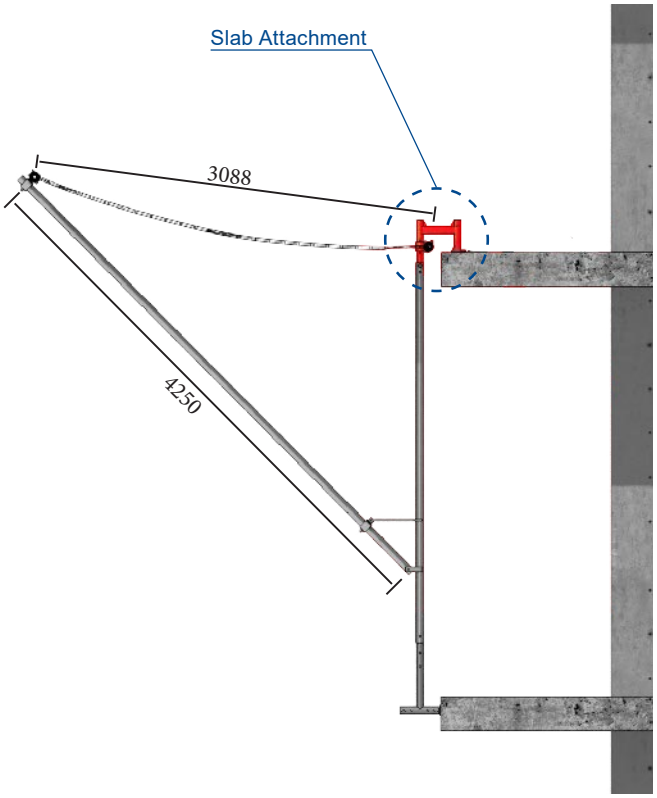

Description	Wt.(kg)
Slab attachment SNF	4.50
Bolt M12x90 SNF	0.10
Hexagon nut M12 SNF	0.01

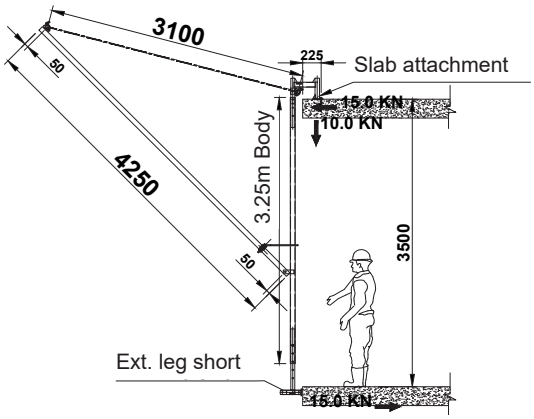


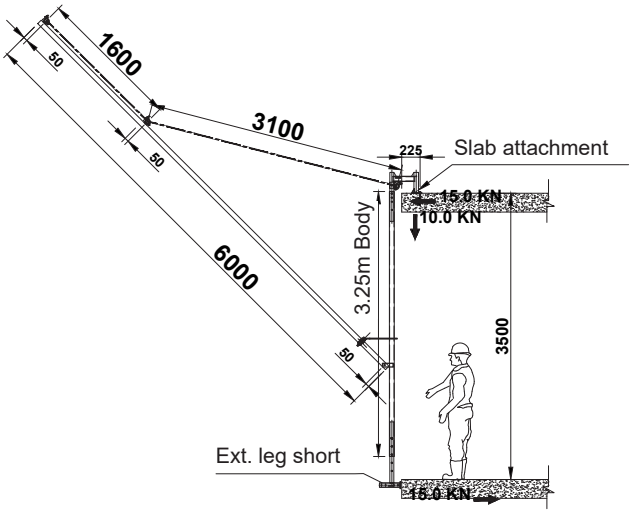


Scaffold Attachment

Used to connect the Doka Fan to scaffold and shoring structures. Connection must be made to the vertical members and user must ensure that loading imposed on the scaffold structure are designed and catered for.




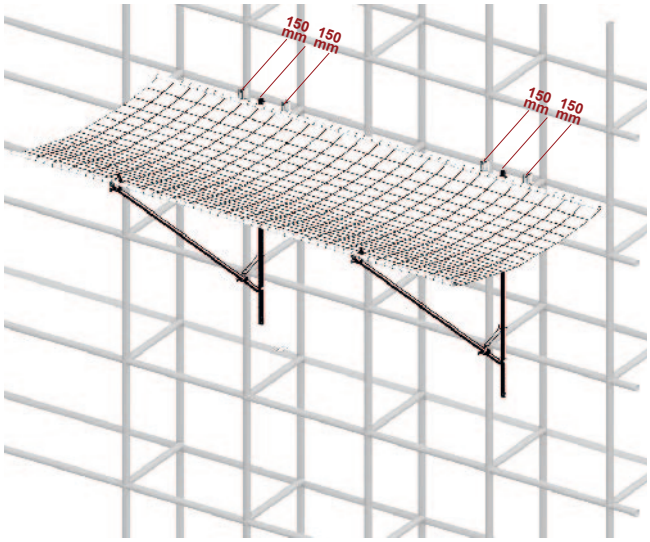



Description	Wt.(kg)
Scaffold attachment SNF	3.35
Bolt M12x90 SNF	0.11

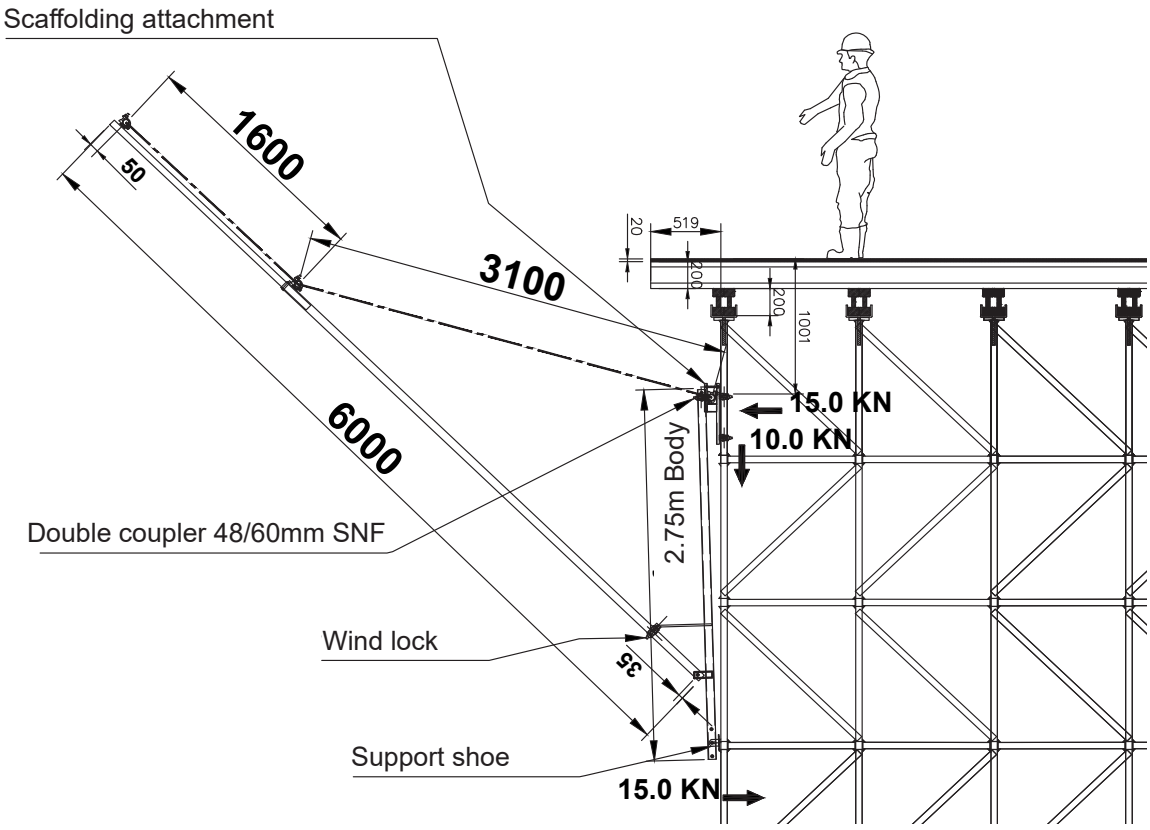


Steel Jaw Clamp Application

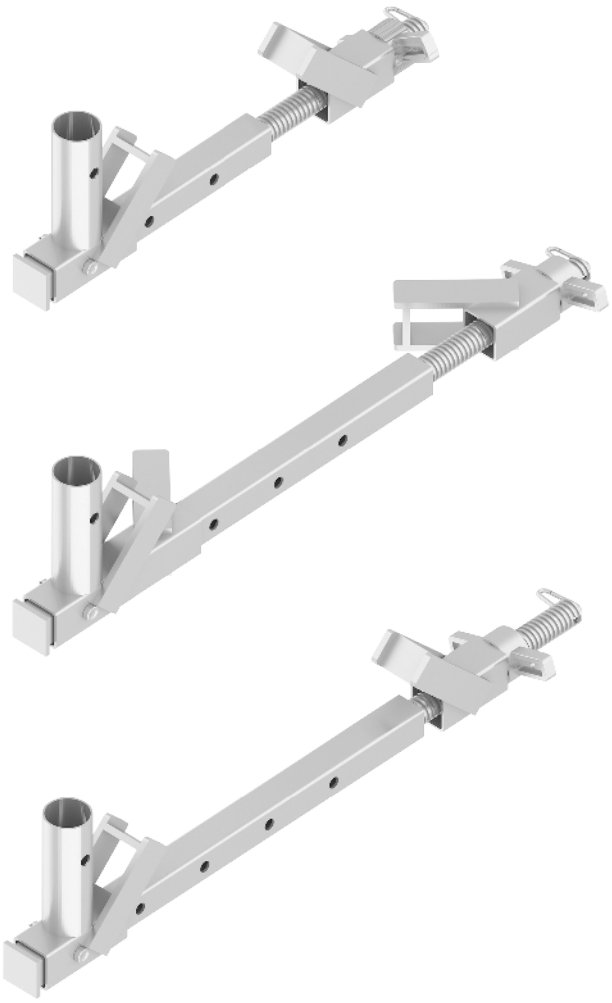

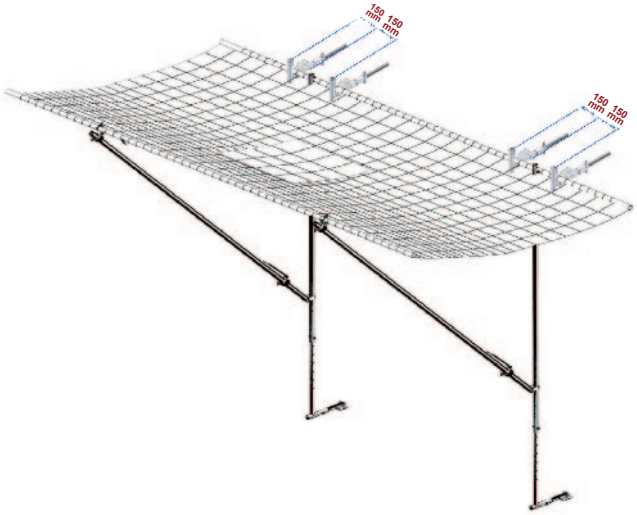

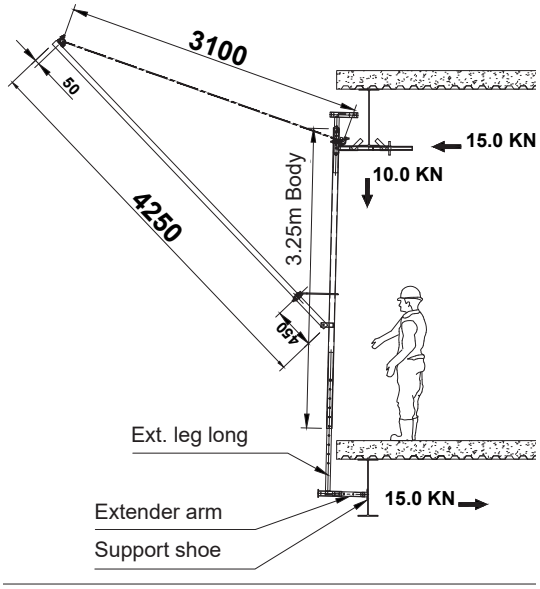

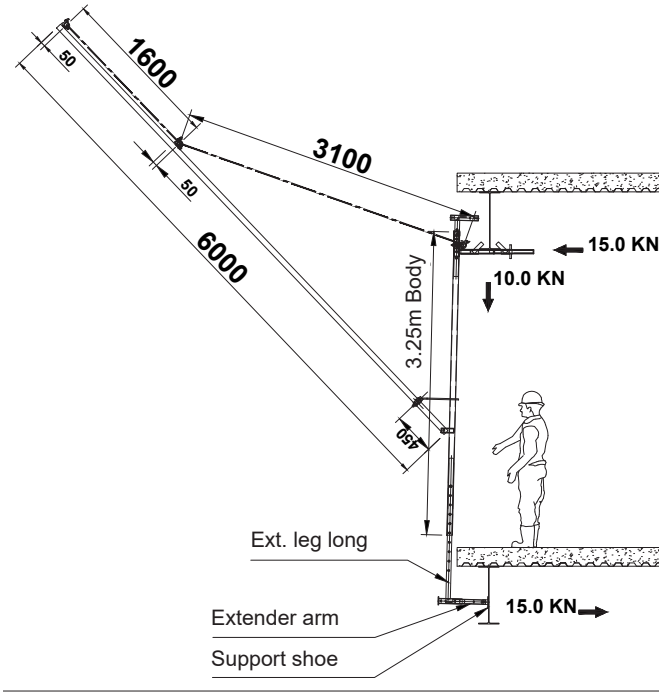

Wind Loading

The following factors have a direct impact on the imposed wind loading on Doka Fans.


- Use of Fine mesh debris netting.
- Topography of the building.
- Height of the building.

Item No.	Standard 3.1m wide		Extra Wide 4.7m wide	
	Wind Lock	Tie Down	Wind Lock	Tie Down
5-20 (Up to 100m high)	—	—	✓	—
20-30 Stories (100 - 135m high)	✓	—	✓	—
30-40 (135 - 175m)	✓	—	✓	✓
40-50 (175 - 225m)	✓	✓	✓	✓
+50 (+225m)	• ✓ *	• ✓	• ✓ *	• ✓

* Doka Recomended triple Body Fans

• Contact Technical Office

Particular attention must be paid on corner Fan units where the vortex wind has higher damaging affect.

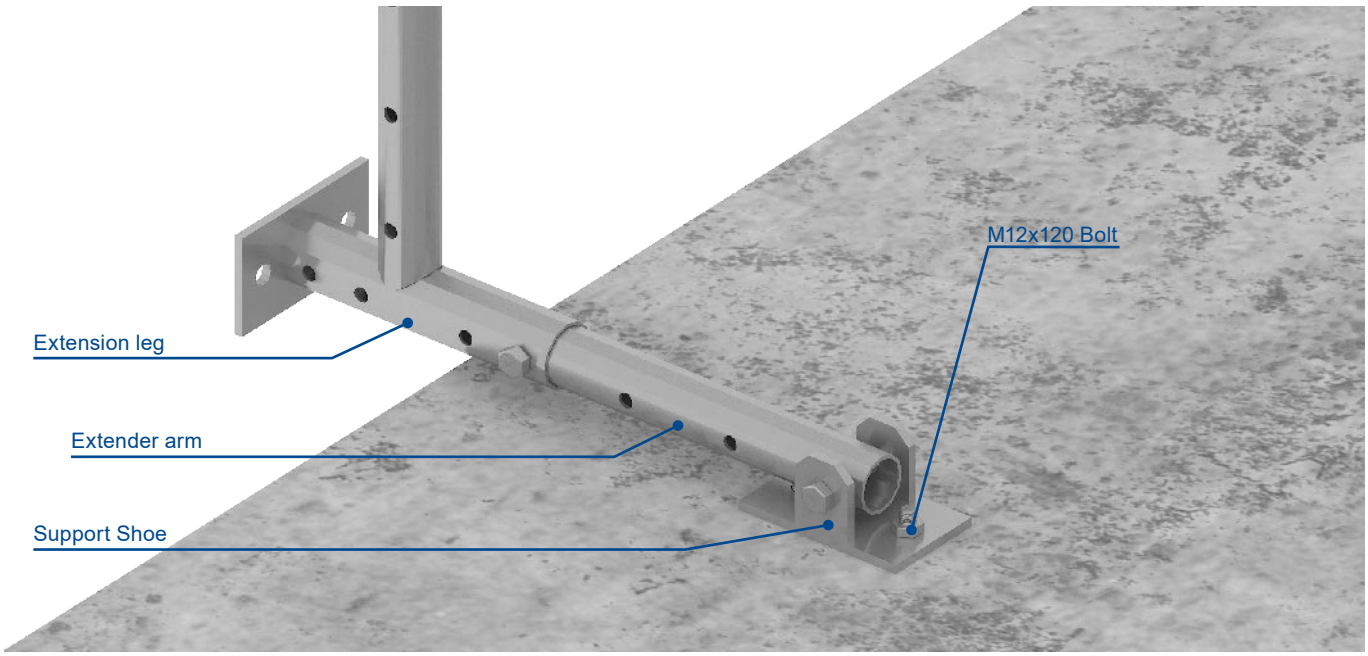

Safety Net Fan net label

Safety Net Fan nets are manufactured in accordance to EN1263-1

Each net is supplied with a label carrying important information for the end user. All manufacturer's data and traceability Identification number is supplied on the label.

End user must ensure that In accordance EN1263-1 the nets are tested for UV degradation.
Test Tags are provided with nets for this purpose. Due date for testing is marked on the label. If in doubt , please contact Doka.

Designation	Standard	System	Class	Mesh Size	Mesh Configuration	Level	Net Size(m)	Testing Agency	Date of Prototype test	Rated Load	Net Material
Safety Net	EN1263-1	T	B-1	M-060	Q	L	6.30m x 3.10m	TÜV SÜD ME	21th May 2018	100KG from 7m(7.0KJ)	HTPP
Safety Net	ANSI A10.37			I-2 3/8"		L	20' 8" x 10' 2"	TÜV SÜD ME	21th May 2018	100 lbs from 23 ft (2300 ft lbs) 45KG from 7m(3.1KJ)	HTPP

SAFETY NET COMPLIANT TO:

- **EN 1263-1:2014**
- **ANSI A10.37-2016**

Register Number:

Date of Production:

Date of Delivery:

Article No. (TSS): TSFNTBYNO3163

www.tss-me.com

WARNING!

THIS SYSTEM IS NOT A PERSONNEL NET AND DOES NOT CONFORM TO ANSI A10.11

1st Test carried out												
Year	2018			2019				2020			2021	
Month	1	2	3	4	5	6	7	8	9	10	11	12
2nd Test carried out												
Year	2018			2019				2020			2021	
Month	1	2	3	4	5	6	7	8	9	10	11	12
3rd Test carried out												
Year	2018			2019				2020			2021	
Month	1	2	3	4	5	6	7	8	9	10	11	12

EL LEON DE ORO

Made in Spain

- Read User Instruction before use
- Do not make any changes to the net
- Flammable material, keep away from sparks, flames , fire
- Recycle responsibly

Lifting Sling Label

Lifting slings are classed as lifting accessories. In accordance with regulation of each country or territory, thorough examination MUST be conducted by the end user every 6 months (recommended) or 12 months.

Lifting Slings are manufactured to EN 1492-1 with a Safe Working load of 250Kg

(F.O.S of 7:1 against failure). Note loading capacity in each orientation on label. If in doubt , please contact Doka.





Safety

Doka Safety Net Inspection Check list

1. Ensure that all Fan units are correctly anchored or attached to the structure.
2. Check that there are no gaps larger than 100mm between Fan unit and structure.
3. Ensure that Fan overlaps are 0.75m minimum at joints.
4. All Fans must be clear of debris and fallen objects.
5. Wind lock where applicable must be engaged.
6. Check that on high structures Fan units are anchored top and bottom.
7. Check that all extension legs bear against the slab below.

All Safety Net components must be inspected by a competent person prior to re-use.
A record inspection of the annual testing of Safety Nets must be kept by the customer.
Following the fall of an object or person in the Nets, the unit must be inspected by a competent person prior to re-use.

Annual inspection of Doka Safety Net Fans

- All Doka Nets are supplied complete with 3 test tags, each with a same unique ID as the safety net.
- It is the requirement of the EN standard that the nets are tested at least once a year for UV degradation. Testing facility is offered by Doka for their customers.
- Depending on the country of use the expected life span of safety nets may be from 2-4 years.
- Due dates for testing of tags are quoted on the safety net label. Otherwise test have to be carried out every 12 months following the first use
- Safety Nets that fail the test or inspection MUST be destroyed.

Doka FAN Cleaning Procedure

Important guidance notes for Doka Safety Net Fan cleaning:

1. It is strongly recommended that the Fan units are inspected and cleaned on a weekly basis. For inspection guidance notes refer to weekly inspection guidelines.
2. A site risk assessment must be carried out for this process if deemed necessary.
3. Before starting the cleaning process, the area below the Fans must be cordoned off to prevent any workers entering this area.
4. Ensure that all workers involved in the cleaning have adequate PPE and Fall Protection Equipment, are competent in the use of such equipment and are trained in working at height. All cleaning process must be carried out from behind the edge protection. If edge protection must be removed for cleaning, workers must wear fall protection equipment. The open areas of edge protection must also be cordoned off to prevent un-authorised entry of other workers.
5. Using the folding rope provided, fold the Fans so that the debris is bagged into the fan net, ensuring that no object is too close to the edge of the fan nets which may accidentally fall off the edge.
6. First remove the heavy objects from the net e.g. Blocks, timber beams, steel props etc, and place inside a bucket for safe disposal.
7. After removal of heavy objects, life the fan nets and throw all small debris on the edge of the slab, ensuring no debris fall from the gaps between slab and fan units. Gaps may also be covered with cloth prior to this process. Brush off debris and move into bucket for safe disposal.
8. In case of fall of fresh concrete on the net, it must be washed and cleaned immediately.
9. In case of concrete on the net, it must be changed.
10. Fans nets must be inspected for any damage or tear after cleaning.
11. Unfold the Fan net into open position.

Doka Fan First Installation Inspection checklists:

Important instructions & notes for Doka Safety Net Fan system:

- Make sure all couplers and bolts are tightened before craning.
- Ensure that lifting slings are installed correctly. 2No. Per unit.
- Fans must be connected to the structure using correct attachment as specified by Doka using correct anchors as specified by Doka.
  Refer to User instruction and drawings.
- Windlocks must be installed at the correct position and engaged when Fan unit is open.
  See user instruction for more detail.
- Ensure that the structure upon which the Fans are installed on(Slab, walls, scaffolding etc) is capable of carrying the imposed loads.
  Check with Eng on site.
- Ensure Minimum overlap of 0.85m between Fan units.
- For tall structures and structures exposed to heavy wind load, ensure that Fan units are tied top and bottom. See user instruction fo further guidance.
- Installers must ensure that crane operator is lifting the units in position with the guidance of a crane banksman and all parties are communications between the involved parties are in place.


Date of Installation:
Location of Installation:
Inspection carried out by:
Date & Signature:
Project Name:

Doka Fan Weekly Inspection checklist:

Important instructions & notes for Doka Safety Net Fan system:

- Ensure lifting slings are intact and under 6 months old. Always use purpose made Lifting Slings.
- Ensure Anchor bolts are tight and un tampered with. Always use Doka Specified Anchor Bolts.
- Ensure there are no wind damage to the Fan Metal structure and wind locks. No Bending of tubes should be visible.
- Fold Fans in upright position and secure if heavy winds are expected.
- Fan nets must be clean of any concrete and debris. Cleaning is required immediately if fresh concrete is in the net.
- Fan nets must be inspected for any damage or tear. Incase of fall of heavy objects in the Fan, Doka must be notified.
- Ensure Minimum overlap of 0.75m between Fan units.


Date of Installation:
Location of Installation:
Inspection carried out by:
Date & Signature:
Project Name:

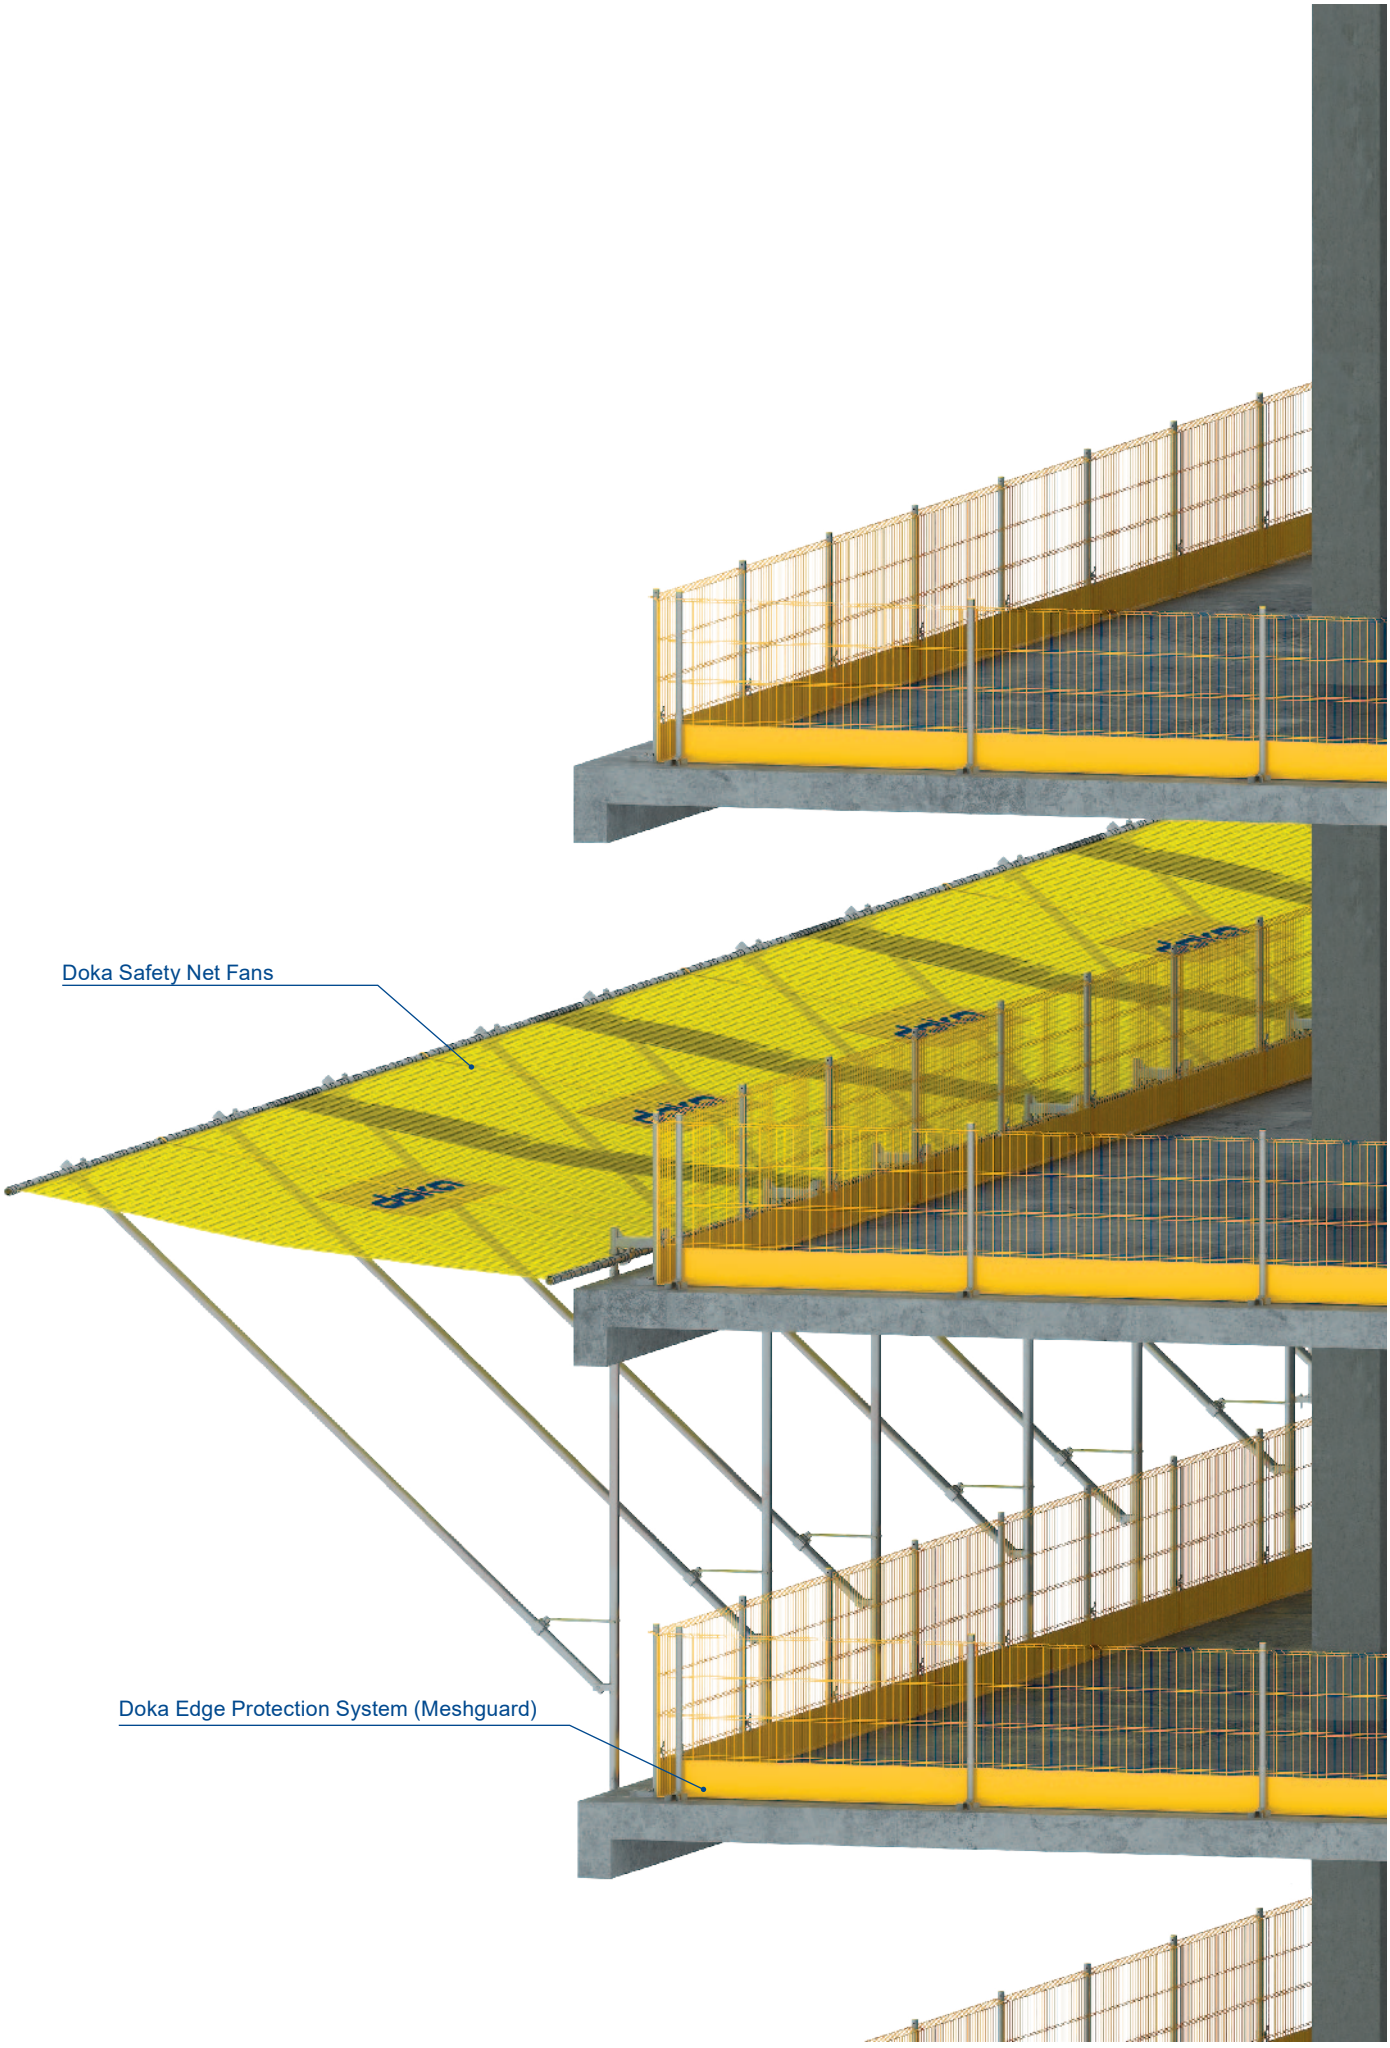
Doka Safety Net Fans
Doka Edge Protection System (Meshguard)


doka
DAMAC
TOWER-A
SAFETY
DAMAC


[kg]

Safety net fan 3.10x6.00m SNF **20.00**
Safety net fan 3.10x4.00m SNF **28.80**

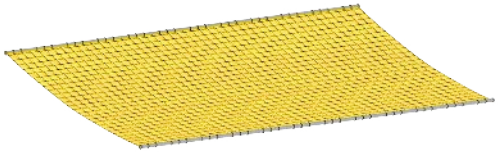

834021010
834021020

Safety net fan extra wide 4.80x6.00m SNF **28.80**
Safety net fan extra wide 4.80x4.00m SNF **43.20**

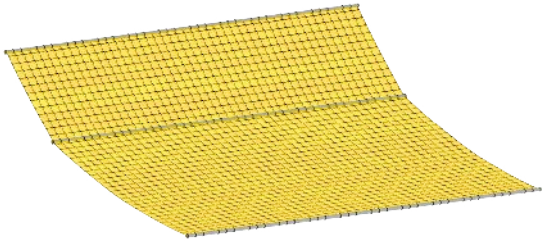

834021030
834021040

Doka Logo SNF **0.08**

834021910

Slab attachment SNF **4.50**

834023010



[kg]

Wall attachment SNF **2.20**

834023020



Slab attachment flat SNF **2.40**

834023030



Knee brace SNF **6.20**

834023050



Support shoe SNF **1.00**

incl. 1 set Bolt M12x90 + Nylok nut M12

834025040



Extension arm tube SNF **1.60**

incl. 1 set Bolt M12x90 + Nylok nut M12

834025902



Scaffold attachment SNF **3.20**


834023040



[kg]

Assembly stool SNF — 5.00

834025080



Anchor bolt M12x120 SNF — 0.10

One time use only!

834025070



Lifting sling SNF — 0.15

834025060




Coupler adjustable SNF — 1.00

834024010




Double coupler 48/60mm SNF — 1.40
Double coupler 48/48mm SNF — 1.00

834024020
834024030



Wind lock SNF — 1.60


834024040



[kg]

Extension leg 0.75m SNF — 4.00
Extension leg 1.50m SNF — 6.00

834022040
834022030



Body 2.75m SNF — 16.8
Body 3.25m SNF — 14.4

incl. 3 sets Bolt M12x90 + Nylok nut M12

834022010
834022020



Diagonal tube 4.25m SNF — 7.00

834025010




Horizontal tube 4.00m SNF — 9.6
Horizontal tube 5.85m SNF — 6.6
Diagonal tube extension SNF — 2.86

834021902
834021901
834025020



Near to you, worldwide

Doka is one of the world leaders in developing, manufacturing and distributing formwork technology for use in all fields of the construction sector.
With more than 160 sales and logistics facilities in over 70 countries, the Doka Group has a highly efficient distribution network which ensures that equipment and technical support are provided swiftly and professionally.
An enterprise forming part of the Umdasch Group, the Doka Group employs a worldwide workforce of more than 6000.

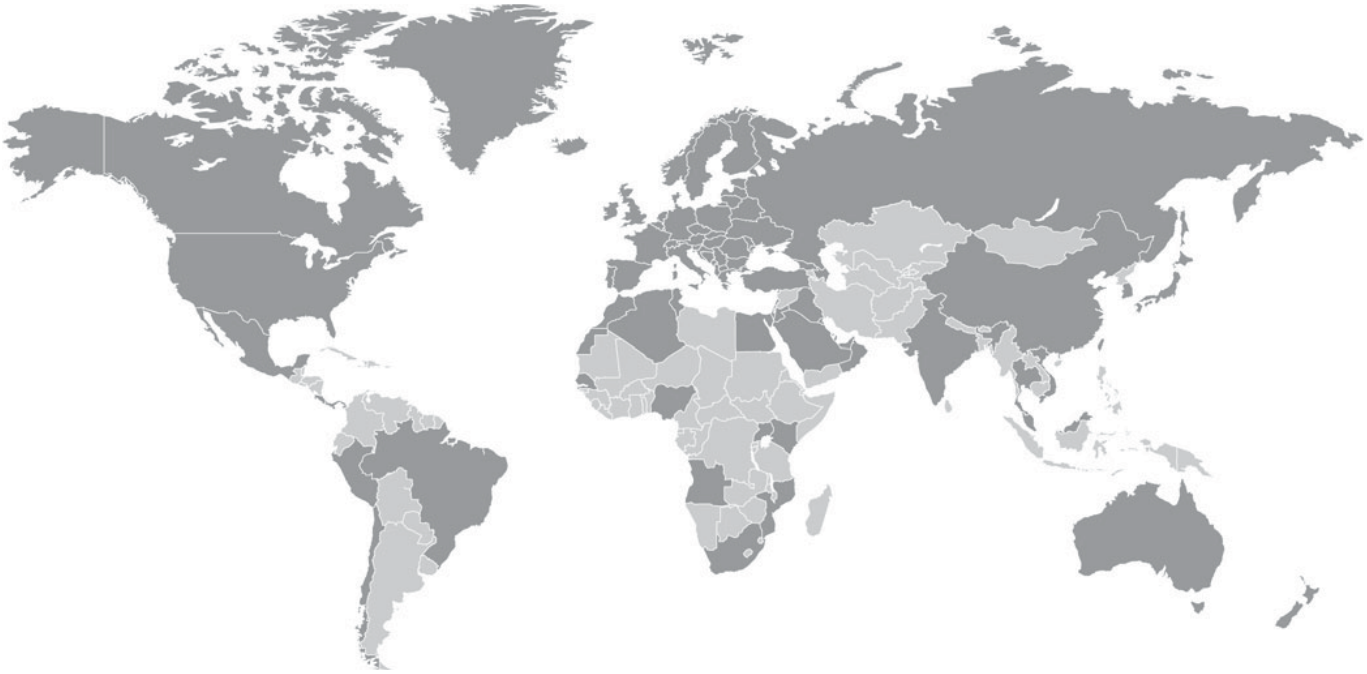

ATI
ATI-PRODUCTS & SERVICES

www.ATI-ConstructionProducts.Com Call (888) 949-3199 Sales@ATI-ConstructionProducts.Com